

AFJ VWL 1530 Van Veen Loop Antenna


CISPR 15 radiated electromagnetic disturbances measurement in the frequency range from 9kHz to 30MHz are applicable to any luminaries which requires disturbance voltage tests and supplies the lamps at frequencies in excess of 100Hz. The test is performed within an enclosed loop antenna of 2m loop diameter. Antennas of this type are known as a Van Veen Loop as defined on CISPR 16-1-4 and consist of three orthogonal loops enclosing a platform where the EUT is positioned.

VWL 1530 is a calibrated 2-metre large Van Veen Loop antenna designed and manufactured to comply with CISPR 15 and CISPR 16-1-4 requirements. The current probes around the inner conductor of each coaxial antenna-cables have a sensitivity of 1V/A over the frequency range from 9kHz to 30MHz, so no antenna factor is needed to use during measuring. The calibrated frequency range is 9kHz to 30MHz.



VWL 1530 is a complete 3-axis antenna with a manual switching unit to select each loop in turn. The loops are 2m in diameter with the lowest point 0.5m above ground and are fitted with specially designed current transducers in fully screened housings. Environment interference is strongly suppressed in open area measurements.

VVL 1530

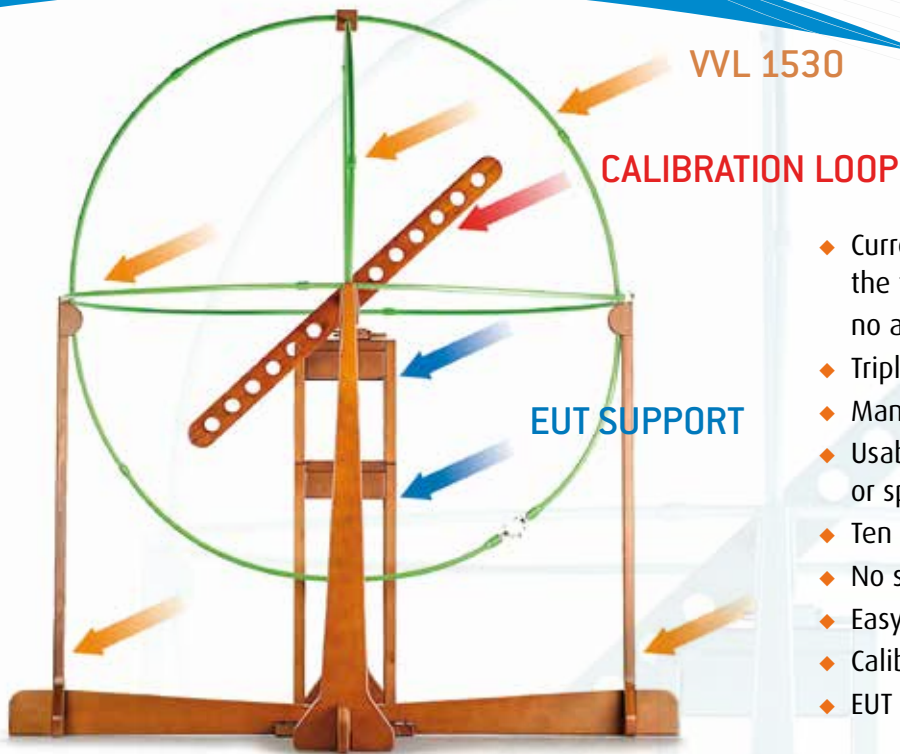

- ◆ Current probes with sensitivity of 1V/A over the frequency range from 9kHz to 30MHz, no antenna factor is needed
- ◆ Triple independent 2m diameter loops
- ◆ Manual switching unit for loop selection
- ◆ Usable with any brand CISPR 16-1-1 EMI receiver or spectrum analyzer
- ◆ Ten minutes to assembly and disassembly
- ◆ No screws
- ◆ Easy to store
- ◆ Calibration loop (optional)
- ◆ EUT support (optional)

TECHNICAL SPECIFICATIONS

Design:	Fully compliant to CISPR 15 and CISPR 16-1-4 standards
Frequency range:	9kHz÷30MHz
Loops:	Triple independent 2m diameter loops, switchable among X, Y, Z
Loop selector:	Manual switching unit
Output impedance:	50Ω
Connector:	N female
Operating temperature:	0° to 45°C
Storage temperature:	-20° to 70°C
Dimensions:	2,6 x 2,1 x 2,1 m (height Z / width X / width Y)

Subject to change without notice

RELATED PRODUCTS

AFJ EMI RECEIVERS

FFT 3010 f=9kHz÷30MHz

FFT 3030 f=9kHz÷300MHz



www.afj.it
www.afj-emv.com
www.afj-russia.com
www.afj-china.cn
www.afj-china.com
www.afj-instruments.com

苏州安辐捷电子科技有限公司

地址：江苏省昆山市玉山镇新南中路567号1号楼A座
1918-1919室 邮编：215300
电话：+86 512 50125796; +86 18994427687
邮件：sales@afj-china.cn

afj
INSTRUMENTS

AFJ INSTRUMENTS SRL
Via F.lli Lorenzetti 6 - 20146 Milan - Italy
Phone +39 02 91434850
sales@afj-instruments.com