
Log Periodic Antenna - Model: 200/1000

Product Information

Log Periodic Antenna measures for emission and immunity in EMC. High power capacity, compact, broadband. Individually calibrated to three meters with a gain factor of antenna provided in tabular form.

Made of aluminum and passivated Avional kevlar epoxy coated anti scratch.



Technical Specifications	
Frequency Range	200-1000 MHz
ROS (medium)	1.2 : 1
Max Input Power	200 W
Nominal Impedance	50 Ohms
Input Connector Type	N Female





Emctest Technologies Sas

Via Marechiese, 273 47900 – RIMINI (RN)

P.IVA: 03768440400

Tel.+39 0541 728562 Fax.+39 0541 1792293

E.mail: emctest@gmail.com

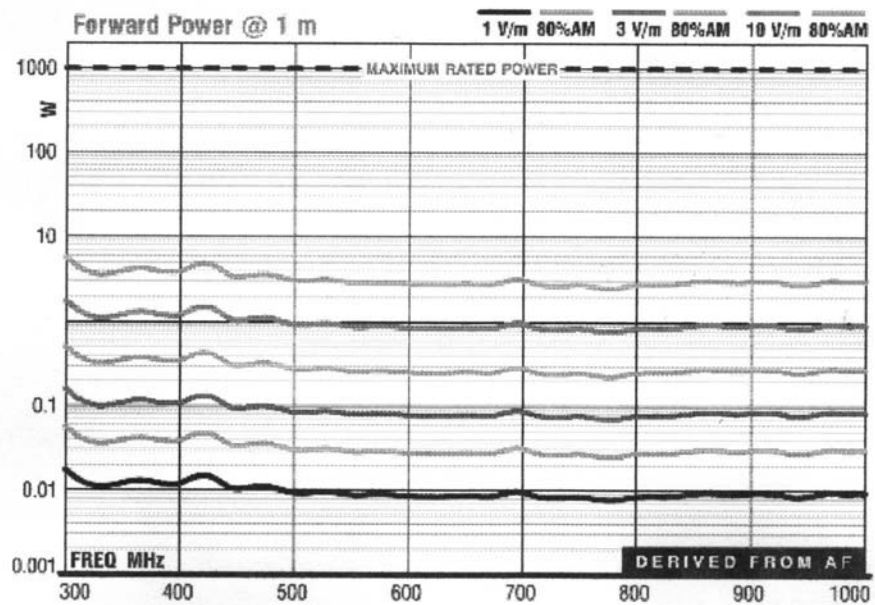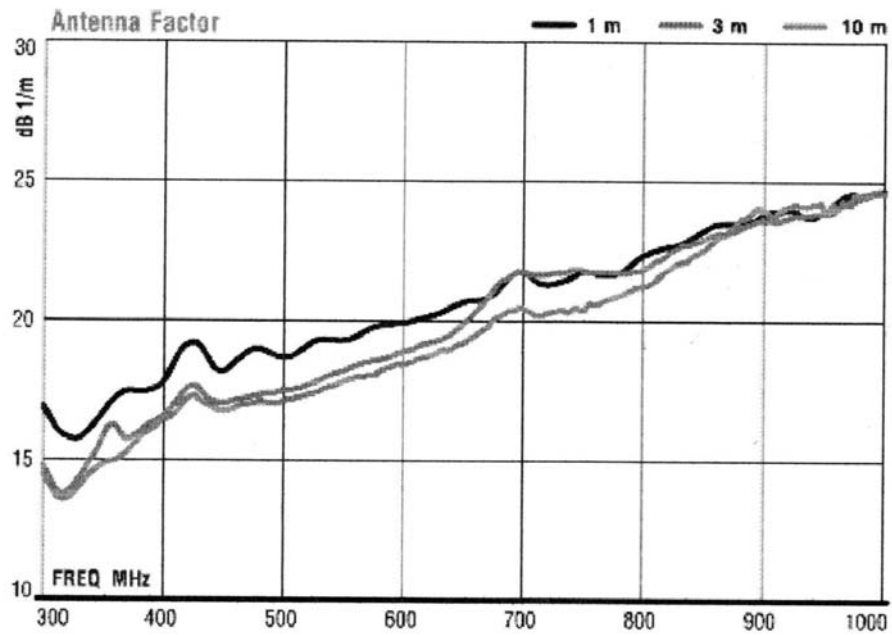





Emctest Technologies Sas

Via Marecchiese, 273 47900 – RIMINI (RN)

P.IVA: 03768440400

Tel.+39 0541 728562 Fax.+39 0541 1792293

E.mail: emctest@gmail.com

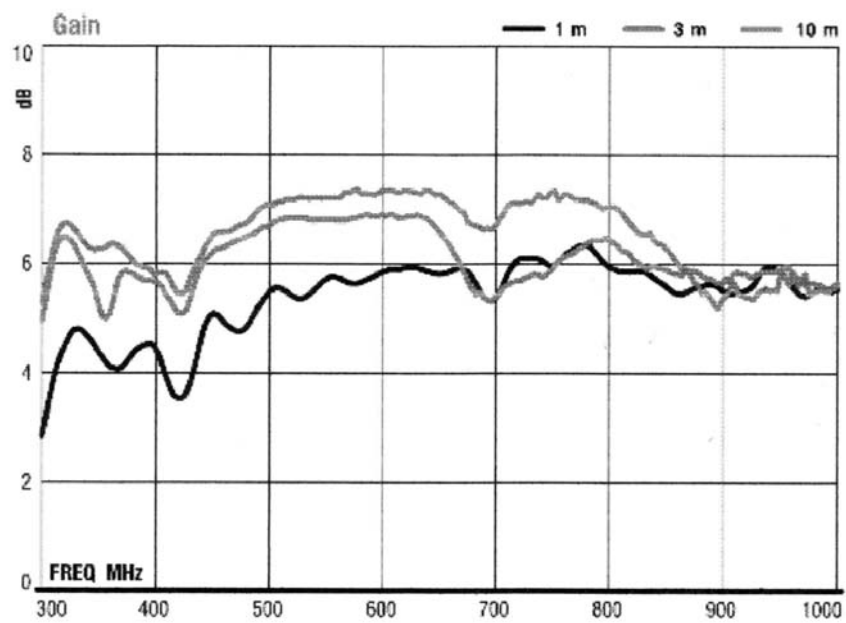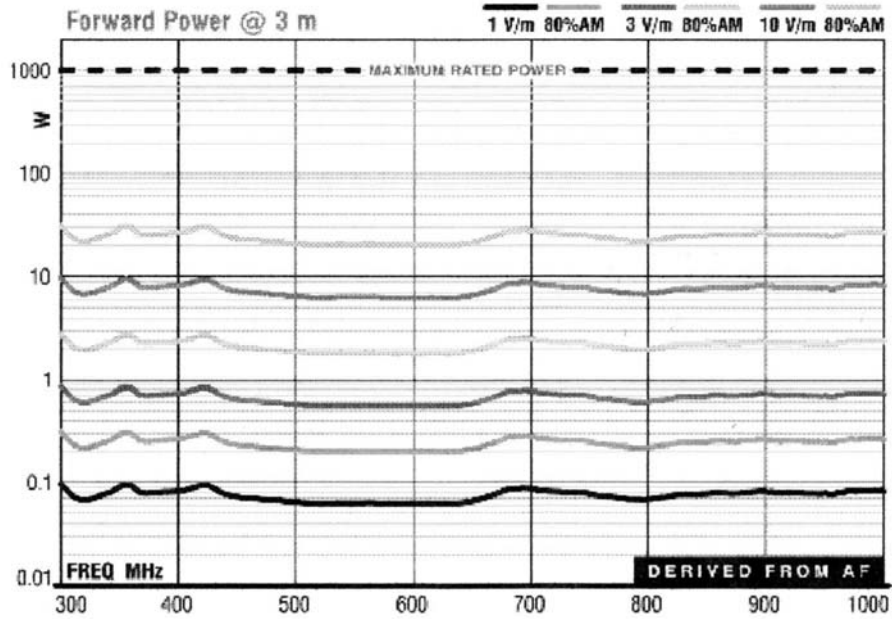




Emctest Technologies Sas

Via Marechiese, 273 47900 – RIMINI (RN)

P.IVA: 03768440400

Tel.+39 0541 728562 Fax.+39 0541 1792293

E.mail: emctest@gmail.com

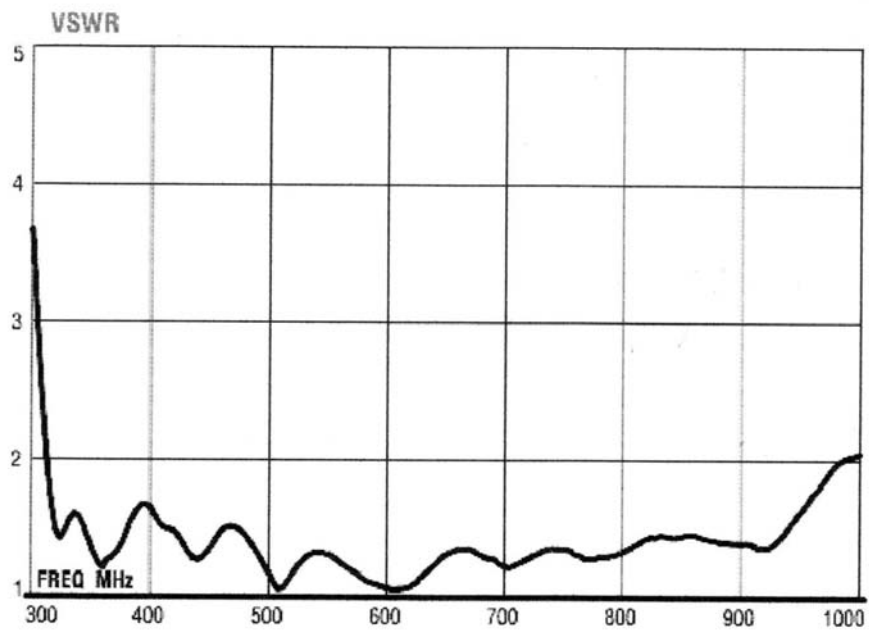



Emctest Technologies Sas

Via Marechiese, 273 47900 – RIMINI (RN)

P.IVA: 03768440400

Tel.+39 0541 728562 Fax.+39 0541 1792293

E.mail: emctest@gmail.com

Frequenza (MHz)	Fattore d' Antenna a 3 m (dB)
200	12.3
225	11.9
250	12.9
275	13.8
300	14.9
325	14.3
350	14.7
375	15.5
400	16.6
425	16.9
450	17.5
475	18.1
500	18.9
525	18.9
550	19.1
575	19.4
600	19.6
625	19.9
650	20.4
675	21.5
700	21.7
725	21.7
750	21.6
775	21.6
800	21.8
825	22.8
850	23.2
875	23.7
900	23.5
925	23.7
950	24.1
975	24.6
1000	25.1

Correction factors log periodic antenna