


RFSL

Features:

- **Excellent Broadband Performance**
- **-10° ~70° C Service Temperature**
- **Fire Retardant** (ISO 11925-2、UL 94 HBF、NRL8093 Test1、2、3)

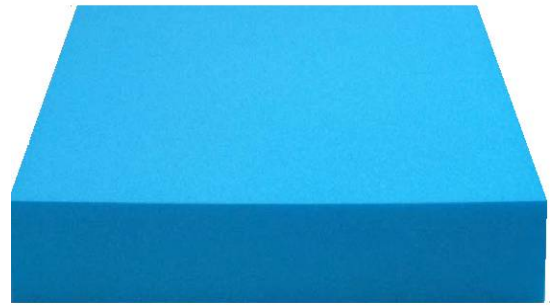


Introduction


RFSL Series absorbing material is HOMESUN

Technology Co., Ltd. R & D flat absorbing foam, flame proof, soft texture of ultra-wideband electromagnetic absorber.

Nominal dimensions & Electromagnetic properties

Type	Thickness	Size	Design Frequency	Reflectivity
RFSL3	3mm ± 0.5mm	600mm × 600mm	>10GHz - 18GHz	> - 15dB
RFSL4	4mm ± 0.5mm	600mm × 600mm	>10GHz - 18GHz	> - 18dB
RFSL6	6mm ± 0.5mm	600mm × 600mm	>8GHz	> - 15dB
RFSL10	10mm ± 0.5mm	600mm × 600mm	>6GHz	> - 15dB
RFSL30	30mm ± 0.5mm	600mm × 600mm	>3GHz	> - 15dB
RFSL50	50mm ± 0.5mm	600mm × 600mm	>2.4GHz	> - 15dB
RFSL100	100 mm ± 0.5mm	600mm × 600mm	>2GHz	> - 15dB

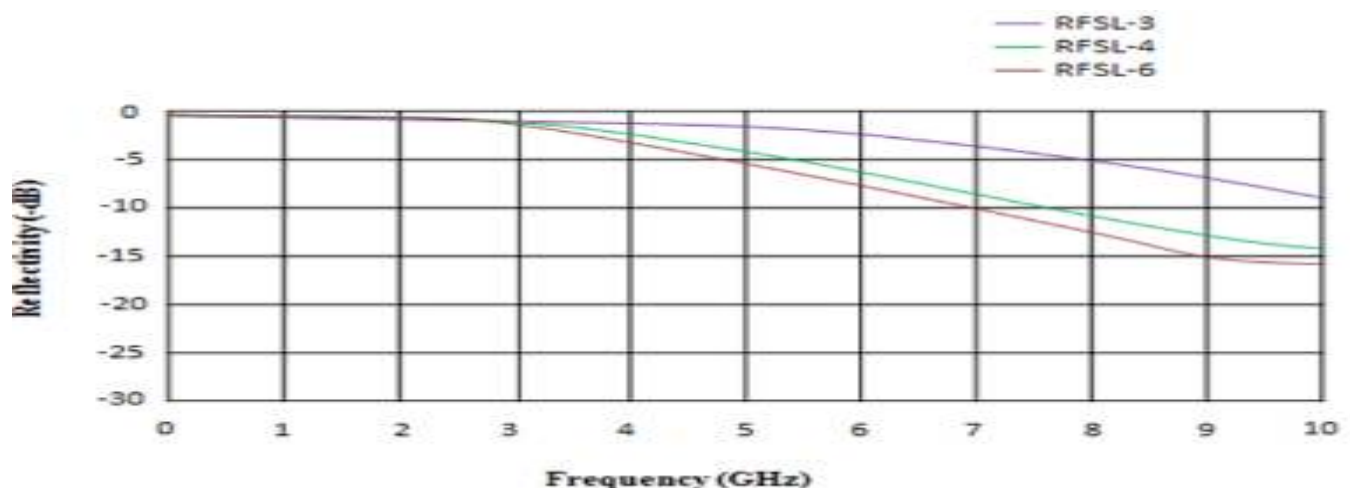

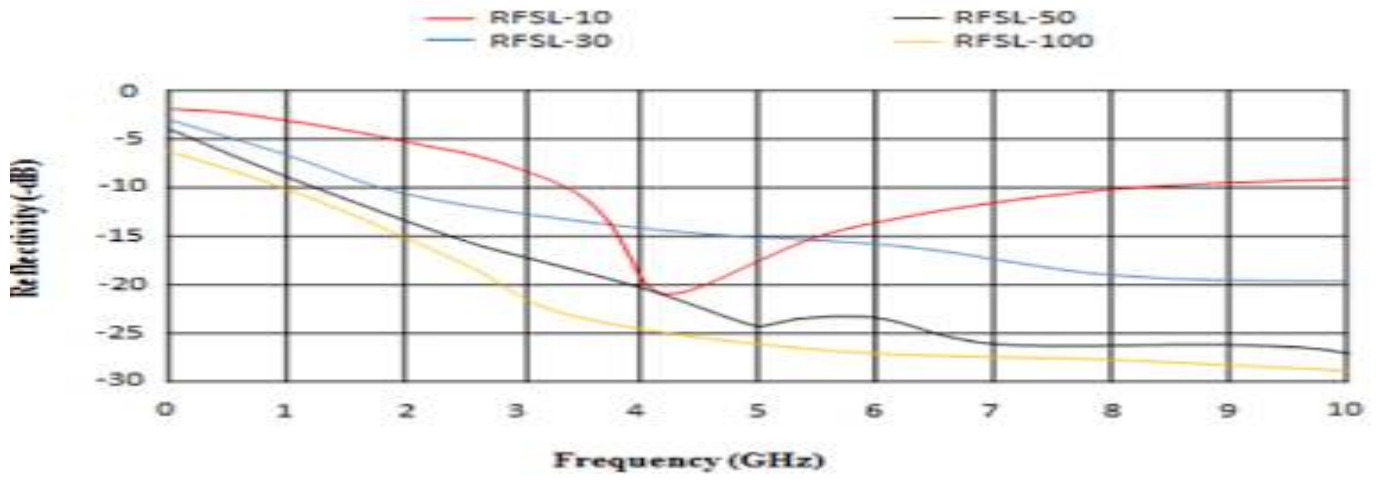

Continued Surmount , Pursue Excellent



www.homesun2004.com

• TEL +886-3-439-9372 • FAX +886-3-439-1806

homesun@homesun2004.com