


# SC6540


The patented modular scanning matrix that revolutionized production line and laboratory electrical safety compliance testing.



Safety agency listed.

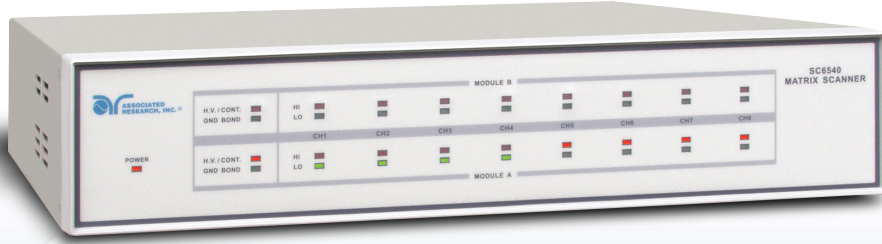

Choose from the following at no charge:



Our patented SC6540 modular scanning matrix pioneered the largest productivity improvement in the electrical safety compliance industry in years. With up to 16 independent high voltage or high current channels in a convenient 2U design, the SC6540 can be customized in 10 different configurations for multi-point Hipot, Ground Bond, Insulation Resistance, and Line Leakage testing. Configure the SC6540 according to your needs, and interface with your OMNIA II, HypotULTRA III, or LINECHECK instrument to improve production line throughput or expand lab testing capability. Operate from the front panel of your AR instrument or utilize a variety of automation interfaces for direct PC control.

	High Voltage	High Current	8 Channel	16 Channel
HN	✓		✓	
HH	✓			✓
HG	✓	✓	✓	
GN		✓	✓	
GG		✓		✓

Available in both master and slave configurations

## PRODUCTIVITY-ENHANCING FEATURES



Interconnect with an OMNIA II, HypotULTRA III or LINECHECK II



Use with automation control software



Simultaneous DUT testing with AW2



Request a Live Web Demo

## FOR USE WITH THE FOLLOWING TESTS



## Modular Scanning Matrix Specifications

Input (Master only)	115 VAC (+/- 10%), 50/60 Hz, single phase 230 VAC (+/- 10%), 50/60 Hz, single phase User selectable
Fuse (Master only)	250 V/2 A/fast-blow
PC Control (Master only)	Choice of Ethernet, GPIB or USB/RS-232
Scanner Control	Master: one scanner bus output controls up to 4 additional slaves Slave: one output and one input
Maximum HV Rating	5 kV AC and DC
Maximum HC Rating	40 Amps
No. of Possible Channels	8 or 16
HV Output Terminations	100 ft. reel HV cable rated for up to 30 kV with 8 HV connectors
GND Output Terminations	20 terminals provided, to accept 10/12 AWG hook-up wire (user supplied wire)
Temperature	32° - 104° F (0° - 40° C)
Humidity	0 - 80%
Altitude	6560 ft. (2000 m)
Dimensions	2U with tilt-up front feet (WxHxD) 17 x 4.07 x 12.96 in. (432 x 103 x 329 mm)
Weight	Master: 20.05 lbs. max. (9.09 kg) (with 2 high voltage modules) Slave: 15.45 lbs. max. (7.01 kg) (with 2 high voltage modules)

## Configurations

The modular design can be customized to fit your application. In addition to master or slave control, the SC6540 can be setup in the following configurations: 8 or 16 high voltage channels, 8 or 16 high current channels, and 8 high voltage channels and/or 8 high current channels. Refer to the images for details.

<b>The different configurations (shown right) are indicated by the following alpha designators</b>	<b>M = Master Scanner</b> <b>H = 8 High Voltage Channels</b> <b>HH = 16 High Voltage Channels</b> <b>G = 8 Ground Bond Channels</b> <b>GG = 16 Ground Bond Channels</b> <b>N = Empty Module</b> <b>S = Slave</b>
--	--

\*Also available in slave configuration.



**Model SC6540 HNM\***  
**8 Channel High Voltage Scanner**



**Model SC6540 HHM\***  
**16 Channel High Voltage Scanner**



**Model SC6540 HGM\***  
**8 Channel High Voltage Scanner**  
**8 Channel High Current Scanner**



**Model SC6540 GNM\***  
**8 Channel High Current Scanner**



**Model SC6540 GGM\***  
**16 Channel High Current Scanner**

Specifications subject to change without notice.

For more information on testing to a specific standard, refer back to the Common Safety Standard Reference Chart.