



## Instruments for Electrical Safety Compliance Testing



**Safety Is Our Only Focus®**

Hipot • Ground Bond • Insulation Resistance • Leakage Current • Functional Run  
Medical Test Systems • HV/HC Multiplexers • Software Solutions

# LONGEVITY FROM LEADERSHIP

For over 80 years we have shaped the electrical safety compliance industry with **innovative** test and measurement solutions. We strive to improve all aspects of the electrical safety testing process for our customers through **dedication** to product quality and our **commitment** to customer satisfaction. Since being incorporated in 1936 we have remained family owned and continue to make business decisions with the **values** of our founder in mind. We are devoted to building lasting relationships with our loyal customers, who lead the manufacturing industry around the world.



We back every AR instrument with an industry-leading 3 year warranty. Choose us for your annual calibration needs and we'll **extend your warranty** at no additional cost for up to 5 years from the date of purchase.



All products are shipped from our factory within **1 business day**, guaranteed. If your order ships late, we pay the freight.



Our **expert technicians** work exclusively with our instruments and ship all calibrations within 2 business days and repairs within 3 business days, guaranteed. If your instrument ships late, we pay the freight.



If for ANY reason you're not **completely satisfied** with your experience, you can simply return your instrument within 45 days of purchase for a full refund.



# A HISTORY OF INNOVATION

**1936** Associated Research was founded.

**1939** We introduced the first battery operated Megohmmeter, the Vibrotest, in the United States.

**1966** We commenced the first Cable Testing/Fault Location school known as ARU. ARU continued for over 25 years.

**1993** We introduced the first complete family of microprocessor-controlled electrical safety instruments.

**1995** We developed the first multi-function electrical safety compliance analyzer.

**1997** We released the first electrical safety instrument with a built-in multiplexer for multi-point testing.

**1999** We introduced Autaware, the first software package for automated instrument control, in the EST industry.

**2001** We released our patented safety feature, SmartGFI®, to provide our customers with maximum operator protection during high voltage testing.

**2012** We launched the first electrical safety compliance analyzer with a built-in AC power source.

**2013** We developed the first mobile app in the electrical safety testing industry.

**2017** We launched the Applications Consulting program.

## OUR MISSION

We build relationships with manufacturers around the globe who trust our products and expertise in electrical safety compliance testing to protect their employees and customers from the dangers of electricity.

## FOCUSED ON EDUCATION

With over 80 years of industry experience, we have the resources and expertise to assist you with your educational needs throughout the life of your product.

- Quick Start Videos
- Quick Start Guides
- Monthly Webinars
- White Papers & Articles
- Live Web Demos
- On-Site Training

## SOCIAL RESPONSIBILITY

We believe that people and organizations must behave ethically and with sensitivity toward cultural, economic and environmental issues.

## GREEN INITIATIVE

We are committed to responsible manufacturing processes and environmental sustainability.

Our Green Initiative is led by decision makers from all departments who are tasked with making day-to-day operations as green as possible.



## SERVING THE COMMUNITY

Proud Sponsor of



We donate a portion of our profits to raising awareness about the dangers of electricity.



We host and support annual food drives to better serve our local community.

# PRODUCT REFERENCE CHART



AC Hipot



DC Hipot



Ground Bond



Ground Continuity



Insulation Resistance



Leakage Current



Functional Run



Built-in AC Power

## Hypot®

3805	•			•				
3865	•	•		•				
3870	•	•		•	•			
3880	500 VA			•				

## HypotULTRA®

7800	500 VA	•		•	•			
7804	•	•	•	•	•			
7820	•			•				
7850	•	•		•	•			
7854	500 VA	•	•	•	•			

## OMNIA® II

8204	•	•	•	•	•			
8254	500 VA	•	•	•	•			
8206	•	•	•	•	•	•	•	
8256	500 VA	•	•	•	•	•	•	
8207	•	•	•	•	•	•	•	•
8257	500 VA	•	•	•	•	•	•	•

## HYAMP®

3240			•					
------	--	--	---	--	--	--	--	--

## HypotMAX®

7705	•							
7710		•						
7715	•							
7720		•						

## LINECHEK® II

620L						•	•	
------	--	--	--	--	--	---	---	--

### Not sure which instrument is right for your application?

Use our product selection tool to identify the instrument that satisfies your testing requirements. Go to [arisafety.com](http://arisafety.com) and follow the link to the **Product Selection Tool**.



USB



RS-232



Ethernet



GPIB

Internal  
MultiplexerModular  
Multiplexer

Autaware®3

Power Source  
Recommended**Hypot®**

3805	•
3865	•
3870	•
3880	•

**HypotULTRA®**

7800	•	•	Opt.	Opt.		•	•
7804	•	•	Opt.	Opt.		•	•
7820	•	•	Opt.	Opt.	•	•	•
7850	•	•	Opt.	Opt.	•	•	•
7854	•	•	Opt.	Opt.		•	•

**OMNIA® II**

8204	•	•	Opt.	Opt.	•	•	•	
8254	•	•	Opt.	Opt.	•	•	•	
8206	•	•	Opt.	Opt.		•	•	•
8256	•	•	Opt.	Opt.		•	•	•
8207	•	•	Opt.	Opt.		•	•	
8257	•	•	Opt.	Opt.		•	•	

**HYAMP®**

3240	•
------	---

**HypotMAX®**

7705	•	•		Opt.
7710	•	•		Opt.
7715	•	•		Opt.
7720	•	•		Opt.

**LINECHEK® II**

620L	•	•	Opt.	Opt.		•	•	•
------	---	---	------	------	--	---	---	---

MedTEST is the most comprehensive Electrical Safety Compliance test system in the industry designed exclusively for medical applications. Customize it to meet your specific medical safety testing needs in order to comply with standards such as UL60601, IEC60601-1, EN60601-1, UL2601, and IEC601-1. See page 24 for more details.

# Hypot®

Production Line Hipot Testing  
at its Finest



Our new Hypot® Series raises the bar for production line Hipot testing. Improve traceability with on-board data storage and easily transfer test result data and test settings via convenient front panel USB. Take the guesswork out of your production line with the direct barcode connection to quickly associate products with pre-programmed test files. We've included advanced features like improved security and a touch screen interface that provides custom pop-up prompts displayed before each test step. We've dramatically reduced the weight and footprint of the Hypot® Series to make safety compliance a less strenuous ordeal. Quickly interconnect with the HYAMP® Series to form a complete safety compliance system.



## Find the Model that Fits Your Testing Needs



AC Hipot



DC Hipot



Ground Continuity



Insulation Resistance



Model	AC Hipot	DC Hipot	Ground Continuity	Insulation Resistance	EN 50191 Compliant
NEW 2017 3805	•				•
NEW 2017 3865	•	•			•
NEW 2017 3870	•	•		•	•
NEW 2017 3880*	500 VA*		•		

\*Meets 200 mA short circuit requirements

## AVAILABLE INTERFACES



USB

## SAFETY & PRODUCTIVITY FEATURES



**SmartGFI®**  
Automatic operator shock protection



**Remote Safety Interlock**  
Easily disable HV output



**Data Transfer**  
Easily import/export test files and data via USB



**Barcode Capability**  
Direct barcode connection



**Multiple Languages**  
Multi-Language user interface



**PLC Remote**  
Basic PLC relay control



**Prompt & Hold**  
Provides alerts & instructions between tests



**Advanced User Security**  
Customize ID & password protection



**Interconnection**  
Interconnect with HYAMP® to form a complete test system



**Ramp-HI®**  
Reduce ramp time during DC Hipot



**Charge-LO®**  
Confirms proper DUT connection



**FailCHEK™**  
Confirms failure detection



**Accredited Cal**  
Accredited calibration options available



**My Menu**  
Customize your own shortcut menu



**On Board Data Storage**  
Save up to 1,500 Test Results on-board

INPUT SPECIFICATIONS			
Voltage	100 – 120 VAC / 200 – 240 VAC ± 10% Auto Range		
Frequency	50/60 Hz ± 5%		
Fuse	3.15 A, Fast Blow 250 VAC 15 A, Fast Blow 250 VAC (3880 only)		
DIELECTRIC WITHSTAND TEST MODE			
Output Rating	3805/3865/3870	5 kVA @ 20 mAAC 6 kVA @ 7.5 mADC (3865/3870 only)	
	3880	5 kVA @ 100mAAC	
Maximum Limit	3805/3865/3870	AC	Range: 0.00 – 20.00 mA Resolution: 0.01 mA
		DC	Range: 0 – 7500 µA Resolution: 1 µA Accuracy: AC and DC ± (2% of setting + 2 counts)
	3880	AC	Range: 0.00 – 99.99 mA Resolution: 0.01 mA Accuracy: ± (2% of setting + 6 counts)
		DC	Range: 0.000 – 9.999 mA Resolution: 0.001 mA
Minimum Limit	3805/3865/3870	AC	Range: 0.000 – 9.999 mA Resolution: 0.001 mA
		DC	Range: 0.0 – 999.9 µA Resolution: 0.1µA Accuracy: AC and DC ± (2% of setting + 2 counts)
	3880	AC	Range: 0.000 – 9.999 mA Resolution: 0.001 mA Accuracy: ± (2% of setting + 6 counts)
		DC	Range: 0.000 – 9.999 mA Resolution: 0.001 mA Accuracy: ± (2% of setting + 6 counts)
Arc Detection	Range:	1-9, ON/OFF Select	
Ground Fault Interrupt	GFI Trip Current: 450 µA max (AC or DC), Fixed		
	HV Shut Down Speed: < 1 msec		
Current Display	3805/3865/3870	AC	Range 1: 0.000 – 4.000 mA Range 2: 3.50 – 20.00 mA
		DC	Range 1: 0.0 µA – 400.0 µA Range 2: 0.350 mA – 4.000 mA Range 3: 3.50 mA – 7.50 mA
	3880	AC	Range 1: 0.000 – 4.000 mA ± (2% of reading + 2 counts) Range 2: 3.50 – 99.99 mA ± (2% of reading + 6 counts)
		DC	Range 1: 0.000 – 4.000 mA ± (2% of reading + 2 counts) Range 2: 3.50 – 99.99 mA ± (2% of reading + 6 counts)
DC Output Ripple	≤ 5% Ripple rms at 6 kVDC @ 7.5 mA Resistive Load		
RAMP-HI Selectable	Range: 0.0 – 7,500 µA, User Selectable		
Charge-LO	0 – 350 µA DC or Auto Set		
Discharge Time	< 50 msec for no load, < 100 msec for capacitive load <b>The maximum capacitive load vs. output voltage:</b> 1µF < 1KV      0.08µF < 4KV 0.75µF < 2KV    0.04µF < 5KV 0.5µF < 3KV     0.015µF < 6KV		
AC Voltage Waveform/ Frequency	Sine Wave, Crest Factor = 1.3 – 1.5 Range: 50 or 60 Hz, User Selectable		
Dwell Timer	Range:	AC 0, 0.2-999.9 sec (0=Continuous) DC 0, 0.4-999.9 sec (0=Continuous)	
Ramp Timer	Range:	Ramp-Up: 0.1 – 999.9 sec Ramp-Down: AC 0.0 – 999.9 sec DC 0, 1.0 – 999.9 sec, (0=OFF)	
Ground Continuity Current	DC 0.1A ± 0.01 A, fixed		

DIELECTRIC WITHSTAND TEST MODE CONTINUED				
Ground Continuity Maximum Limit Minimum Limit	Range:	0.00 – 1.50 Ω		
	Resolution:	0.01 Ω		
	Accuracy:	± (3% of setting + 0.02 Ω)		
Ground Continuity Auto Offset	Range:	0.00 – 0.50 Ω		
	Resolution:	0.01 Ω		
	Accuracy:	± (3% of setting + 0.02 Ω)		
Short Circuit Current	> 200 mA (3880 only)			
INSULATION RESISTANCE TEST MODE				
Voltage Setting	Range:	30 – 1,000 VDC		
	Resolution:	1 V		
	Accuracy:	± (2% of setting + 5 V)		
Resistance Display	Range:	1 – 50,000 MΩ		
	Resolution:	30 – 99 VDC	100 – 499 VDC	500 – 1000 VDC
	MΩ	MΩ	MΩ	MΩ
	0.001	1.000 – 1.999	1.000 – 1.999	1.000 – 9.999
	0.01	2.00 – 19.99	2.00 – 19.99	10.00 – 99.99
	0.1	20.0 – 199.9	20.0 – 199.9	100.0 – 999.9
	1	200 – 10,000	200 – 20,000	1000 – 50000
	Accuracy:	± (8% of reading+2 counts) at test voltage 30 – 499 V and 1.00–999.9 MΩ		
	At test voltage 500-1000 V ± (2% of reading + 2 counts) for 1.00 – 999.9 MΩ ± (5% of reading + 2 counts) for 1000 – 9999 MΩ ± (15% of reading + 2 counts) for 10000 – 50,000 MΩ			
	HI & LO-Limit	Range:	0, 1.00 – 99.99 MΩ (0=OFF, HI-Limit ONLY)	
Resolution:		0.01 MΩ 1000-50000 1 MΩ		
Accuracy:		At test voltage 500-1000 V ± (2% of setting + 2 counts) for 1.00 – 999.9 MΩ ± (5% of setting + 2 counts) for 1000 – 9999 MΩ ± (15% of setting + 2 counts) for 10000 – 50,000 MΩ		
Charge-LO	Range:	0.000 – 3.500 µA DC or Auto Set		
	Ramp Timer	Range:	Ramp-Up: 0.1 – 999.9 sec Ramp-Down: 0, 1.0 – 999.9 sec, (0=OFF)	
	Delay Timer	Range:	0.5 – 999.9 sec (0=OFF)	
Dwell Timer	Range:	0, 0.5 – 999.9 sec (0=continuous)		
GENERAL SPECIFICATIONS				
Remote Control and Signal I/O	Inputs: Test, Reset, Hardware Interlock, File Recall Outputs: Pass, Fail, Test-in-Process, Reset-Out, Start-Out			
Vmax	Displays the maximum voltage value recorded during a breakdown			
Imax	Displays the maximum leakage current value read during a test			
Memories	50 steps 1500 test results			
Interface	USB standard			
Language	English, Traditional Chinese, Simplified Chinese, Turkish, Portuguese, Spanish, German, French			
Security	Multiple user setups with ID and password			
Dimensions (W x H x D)	8.5" x 3.5" x 11.9" (215 mm x 88.1 mm x 300 mm)  16.93" x 5.20" x 11.84" (430 mm x 132 mm x 300 mm)			
Weight	12 lbs (5.46 kgs) 50 lbs (23 kgs)			

**Why We Use Counts**

Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

Specifications subject to change without notice.

# HypotULTRA®

The Most Flexible and Feature-Rich Automated Dielectric Analyzer Available



Our new HypotULTRA® models provide all the tools you need to modernize your production line with best-in-class 4-in-1 test capability and a slim 2U design. We've added 40A AC Ground Bond test capability to HypotULTRA®'s already impressive feature list for manufacturers that aim to adopt best testing practices without sacrificing productivity. Whether you're looking to improve traceability with on-board data storage, increase efficiency with our intuitive touch screen interface and direct barcode scanner connection, or automate with a variety of communication interfaces, HypotULTRA® was designed to take your production line to the next level.



## Find the Model that Fits Your Testing Needs



AC Hipot



DC Hipot



40A Ground Bond



Ground Continuity



Insulation Resistance



	AC Hipot	DC Hipot	40A Ground Bond	Ground Continuity	Insulation Resistance	EN 50191 Compliant
7800*	500 VA*	•	•	•	•	•
NEW 2017 7804	•	•	•	•	•	•
7820	•	•	•	•	•	•
7850	•	•	•	•	•	•
NEW 2017 7854	500 VA*	•	•	•	•	•

\*Meets 200 mA short circuit requirements

## AVAILABLE INTERFACES



USB



RS-232



Ethernet  
(Optional)



GPIB  
(Optional)

## SAFETY & PRODUCTIVITY FEATURES



**SmartGFI®**  
Automatic operator shock protection



**Remote Safety Interlock**  
Easily disable HV output



**Data Transfer**  
Easily import/export test files and data via USB



**Barcode Capability**  
Direct barcode connection



**Multiple Languages**  
Multi-Language user interface



**Ground Bond Voltage Drop**  
Monitor voltage drop vs resistance



**ProVOLT®**  
Multi-dwell cycles at different voltages for ACW/DCW/IR



**Internal Multiplexer**  
Available with optional HV multiplexer (4 or 8 ports)



**Modular Multiplexer**  
Compatible with SC6540 multiplexers



**FailCHECK™**  
Confirms failure detection



**Prompt & Hold**  
Provides alerts & instructions between tests



**Autoware®3**  
Advanced Automation Control Software



**Advanced User Security**  
Customize ID & password protection



**Ramp-HI®**  
Reduce ramp time during DC Hipot



**Charge-LO®**  
Confirms proper DUT connection



**PLC Remote**  
Basic PLC relay control



**Negative DC Hipot**  
Reverse polarity DC Hipot (optional)



**On Board Data Storage**  
Save up to 100,000 Test Results on-board

**INPUT SPECIFICATIONS**

Voltage	100 – 120 VAC / 200 – 240 VAC ± 10% Auto Range	
Frequency	50/60 Hz ± 5%	
Fuse	7804/7820/7850:	6.3A, Slow Blow 250 VAC
	7800/7854:	15A, Fast Blow 250 VAC

**AC WITHSTAND TEST MODE (All Models)**

Output Voltage	Range: 0 – 5,000 VAC Resolution: 1 VAC Accuracy: ± (2% of setting + 5V)
Output Frequency	50/60 Hz ± 0.1%, User Selection
Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5
Output Regulation	± (1% of output + 5V)
HI and LO-Limit Total	<b>Total</b> Range: 0.000 – 9.999 mA Resolution: 0.001 mA Range: 10.00 – 30.00 mA (10 – 99.99 mA, Models 7800/7854) Resolution: 0.01 mA Accuracy: ± (2% of setting + 2 counts) 7804/7820/7850 ± (2% of setting + 6 counts) 7800/7854
	<b>Real</b> Range: 0.000 – 9.999 mA Resolution: 0.001 mA Range: 10.00 – 30.00 mA (10 – 99.99 mA 7800/7854) Resolution: 0.01 mA Accuracy: ± (3% of setting + 50 µA)
Ramp Up Timer	Range: 0.1 – 999.9 sec
Ramp Down Timer	Range: 0.0 – 999.9 sec
Dwell Timer	Range: 0, 0.2 – 999.9 sec (0=Continuous)
Ground Continuity	Current: DC 0.1A ± 0.01A, fixed
Current	Max. Ground Resistance: 1.0 Ω ± 0.1 Ω
Arc Detection	Range: 1 – 9 ranges (9 is most sensitive)

**DC WITHSTAND TEST MODE (Models 7800/7804/7850 & 7854 Only)**

Output Voltage	Range: 0 – 6000 VDC Resolution: 1 V Accuracy: ± (2% of setting + 5 V)
DC Output Ripple	<4% (6 KV/10 mA at Resistive Load)
HI and LO-Limit	Range: 0.0000 – 0.9999 µA Resolution: 0.0001 µA Accuracy: ± (2% of setting + 10 counts), Low Range is ON
	Range: 1.000 – 9.999 µA Resolution: 0.001 µA Accuracy: ± (2% of setting + 10 counts), Low Range is ON
	Range: 10.00 – 99.99 µA Resolution: 0.01 µA Accuracy: ± (2% of setting + 10 counts), Low Range is ON
	Range: 100.0 – 999.9 µA Resolution: 0.1 µA Accuracy: ± (2% of setting + 2 counts)
	Range: 1,000 – 20,000 µA Resolution: 1 µA Accuracy: ± (2% of setting + 2 counts)
Ramp Up Timer	Range: 0.4 - 999.9 sec, Low Range is OFF 0.5 – 999.9 sec, Low Range is ON
Ramp Down Timer	Range: 0.0, 1.0 – 999.9 sec (0=OFF)
Dwell Timer	Range: 0, 0.4 – 999.9 sec (0=Continuous) 0, 1.0 – 999.9 sec, Low Range is ON
Ramp-HI Selectable	Range: 0 – 20 mA selectable
Charge-LO	Range: 0.0 – 350.0 µA DC or Auto Set
Discharge Time	< 50 ms for no load, < 100 ms for capacitive load
Maximum Capacitive Load DC Mode	1µF < 1kV      0.0 µF < 4 kV 0.75 µF < 2 kV      0.04 µF < 5 kV 0.5 µF < 3 kV      0.015 µF < 6 kV
Arc Detection	Range: 1 – 9 ranges (9 is most sensitive)

**INSULATION RESISTANCE MODE (Models 7800/7804/7850 & 7854 Only)**

Output Voltage, DC	Range: 10 – 1,000 VDC Resolution: 1 VDC Accuracy: ± (2% of setting + 2 counts)
	Range: 1,001 – 6,000 VDC Resolution: 1 VDC Accuracy: ± (2% of setting + 5 V)

**INSULATION RESISTANCE MODE (Models 7800/7804/7850 & 7854 Only)**

Charging Current HI and LO-Limit	Maximum > 20 mA peak
	Range: 0.10 MΩ – 99.9 MΩ (HI-Limit: 0=OFF) Resolution: 0.01 MΩ Accuracy: ± (2% of setting + 2 counts)
	Range: 100.0 MΩ – 999.9 MΩ Resolution: 0.1 MΩ Accuracy: 1,000 – 9,999 ± (5% of setting + 2 counts)
	Range: 1,000 MΩ – 50,000 MΩ Resolution: 1 MΩ Accuracy: 10,000 – 50,000 ± (15% of setting + 2 counts)
Ramp Up Timer	Range: 0.1 – 999.9 sec
Ramp Down Timer	Range: 1.0 – 999.9 sec
Dwell Timer	Range: 0.5 – 999.9 sec (0=Continuous)
Delay Timer	Range: 0.5 – 999.9 sec
Charge-LO	0.000 – 3.500 µA or Auto Set

**CONTINUITY TEST MODE (All Models)**

Output Current, DC	1 A for 0.000 – 1.000 Ω, 0.1 A for 1.01 – 10.00 Ω 0.01 A for 10.01 – 100 Ω, 0.001 A for 101 – 1,000 Ω 0.0001 A for 1001 – 10,000 Ω, 1 A is Max
Resistance Display Max & Min Max-Lmt	Range: 0.000 – 1.000 Ω Resolution: 0.001 Ω Accuracy: ± (1% of setting + 3 counts)
	Range: 1.01 – 10.00 Ω Resolution: 0.01 Ω Accuracy: ± (1% of setting + 3 counts)
	Range: 10.1 – 100.0 Ω Resolution: 0.1 Ω Accuracy: ± (1% of setting + 3 counts)
	Range: 101 – 1,000 Ω Resolution: 1 Ω Accuracy: ± (1% of setting + 3 counts)
	Range: 1,001 – 10,000 Ω Resolution: 1 Ω Accuracy: ± (1% of setting + 10 counts)
Dwell Timer	Range: 0, 0.4 – 999.9 sec (0=Continuous)
Resistance Offset	Range: 0.000 – 10.00 Ω

**GROUND BOND TEST MODE (Models 7804 & 7854 Only)**

Output Voltage (Open Circuit Voltage)	Range: 3.00 – 8.00 VAC Resolution: 0.01 VAC Accuracy: ± (2% of setting + 3 counts) Open Circuit
Output Current	Range: 1.00 – 40.00 A Resolution: 0.01 A Accuracy: ± (2% of setting + 2 counts)
Maximum Loading	1.00 – 10.00 A, 0 – 600 mΩ 10.01 – 30.00 A, 0 – 200 mΩ 30.01 – 40.00 A, 0 – 150 mΩ
HI and LO-Limit	Range: 0 – 150 mΩ for 30.01 – 40.00 A 0 – 200 mΩ for 10.01 – 30.00 A 0 – 600 mΩ for 1.00 – 10.01 A Resolution: 1 mΩ Accuracy: ± (2% of setting + 2 counts)
	Range: 0 – 600 mΩ Resolution: 1 mΩ Accuracy: ± (3% of setting + 3 counts)
Dwell Timer	Range: 0, 0.5 – 999.9 sec (0=Continuous)
Milliohm Offset	0 – 200 mΩ
Voltage Offset	0.0 - 6.0 V

**GENERAL SPECIFICATIONS**

Memory	2,000 steps, 200 steps per test file max 100,000 test results
Mechanical	Bench or rackmount (2U height) with feet
Interface	Standard: USB, RS-232 Optional: GPIB (IEEE-488.2), Ethernet or USB Printer
SmartGFI®	0, 0.4 – 5.0 mA (0=OFF)
Dimensions (W x H x D)	16.92" x 3.50" x 15.75" (430 x 88.1 x 400mm)
Weight	7800: 45 lbs (20.4 kg)
	7804: 41 lbs (18.6 kg)
	7820: 34 lbs (15.4 kg)
	7850: 35 lbs (15.9 kg)
	7854: 46.3 lbs (21 kg)

# OMNIA® II

The Most Advanced Electrical Safety Compliance Analyzer in the Industry



Our OMNIA® II Series is a complete line of multi-function electrical safety compliance analyzers designed to satisfy even the most demanding application requirements. We've included exclusive productivity-enhancing features and the latest in safety technology to make this product line the envy of the industry. With 6 models to choose from, a multi-language menu system and a variety of automation interfaces available, the OMNIA® II is ready for global deployment.



## Find the Model that Fits Your Testing Needs



AC Hipot



DC Hipot



40A Ground Bond



Ground Continuity



Insulation Resistance



Leakage Current



Functional Run



Built-in AC Power



Power Source Recommended



EN 50191 COMPLIANT

8204	•	•	•	•	•	•	•	•	•	•
8254	500	•	•	•	•	•	•	•	•	•
8206	•	•	•	•	•	•	•	•	•	•
8256	500	•	•	•	•	•	•	•	•	•
8207	•	•	•	•	•	•	•	•	•	•
8257	500	•	•	•	•	•	•	•	•	•

\*Meets 200 mA short circuit requirements

## AVAILABLE INTERFACES



USB



RS-232



Ethernet (Optional)



GPIB (Optional)

## SAFETY & PRODUCTIVITY FEATURES



**SmartGFI®**  
Automatic operator shock protection



**Remote Safety Interlock**  
Easily disable HV output



**Prompt & Hold**  
Provides alerts & instructions between tests



**Multiple Languages**  
Multi-Language user interface



**Active Link®**  
Continuous power during test steps



**My Menu**  
Customize your own shortcut menu



**DualCHEK®**  
Simultaneous Hipot and Ground Bond



**Internal Multiplexer**  
Available with optional HV multiplexer (4 or 8 ports)



**Modular Multiplexer**  
Compatible with SC6540 multiplexers



**PLC Remote**  
Basic PLC relay control



**FailCHEK™**  
Confirms failure detection



**Cal-Alert®**  
Tracks and alerts for calibration



**Ramp-HI®**  
Reduce ramp time during DC Hipot



**Charge-LO®**  
Confirms proper DUT connection



**Arc Detection**  
High frequency filter for corona detection



**Autaware®3**  
Advanced Automation Control Software



**Accredited Cal**  
Accredited calibration options available



**Ground Bond Voltage Drop**  
Monitor voltage drop vs resistance

INPUT SPECIFICATIONS	
Voltage	115/230 V Auto Range, ± 15 % Variation
Frequency	50/60 Hz ± 5%
Fuse	115 VAC, 230 VAC – 10 A Slow Blow 250 VAC
DIELECTRIC WITHSTAND TEST MODE	
Output Rating	5 kV @ 50 mAAC 5 kV @ 100 mAAC (Models 825X) 6 kV @ 20 mADC
Voltage Setting	Resolution: 1 V Accuracy: ± (2% of setting + 5 volts)
HI and LO-Limit	<b>AC Total</b>
	Range: 0.000 – 9.999 mA Resolution: 0.001 mA
	Range: 10.00 – 50.00 mA (100.00 mA, models 825X) Resolution: 0.01 mA
	Accuracy: ± (2% of setting + 2 counts)
	<b>AC Real</b>
	Range: 0.000 – 9.999 mA Resolution: 0.001 mA
Range: 10.00 – 50.00 mA (100.00 mA, models 825X) Resolution: 0.01 mA	
Accuracy: ± (3% of setting + 50 µA)	
DC	Range: 0 – 999.9 µA Resolution: 0.1 µA
	Range: 1,000 – 20,000 µA Resolution: 1 µA
	Accuracy: ± (2% of setting + 2 counts)
Arc Detection	Range: 1 – 9 (9 is most sensitive)
Ground Continuity	Current: DC 0.1 A ± 0.01 A, fixed Max. Ground Resistance: 1 Ω ± 0.1 Ω, fixed
Ground Fault Interrupt	GFI Trip Current: 0.4 mA – 5.0 mA (AC or DC) HV Shut Down Speed: < 1 ms
DC Output Ripple	≤ 4% Ripple rms at 5 kVDC at 20 mA Resistive Load
Discharge Time	≤ 50 ms No Load, < 100 ms for Capacitive Load
Max Capacitive Load, DC Mode	1 µF < 1 kV                      0.08 µF < 4 kV 0.75 µF < 2 kV                0.04 µF < 6 kV 0.5 µF < 3 kV
AC Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5
Output Frequency	Range: 60 or 50 Hz, User Selection (400/800 Hz optional)
Output Regulation	± (1% of output + 5 V) from no load to full load and over input voltage range
Dwell Timer	Range: AC 0.4 – 999.9 sec (0=Continuous) DC 0.3 – 999.9 sec (0=Continuous)
Ramp Timer	Ramp-up: AC 0.1 – 999.9 sec, DC 0.4 – 999.9 sec Ramp-Down: AC 0.0 – 999.9 sec, DC 0.0, 1.0 – 999.9 sec (0=Continuous)
INSULATION RESISTANCE TEST MODE	
Voltage Setting	Range: 30 – 1000 VDC
HI and LO-Limit	Range: 0.05 MΩ – 99.99 MΩ Resolution: 0.01 MΩ
	Range: 100.0 MΩ – 999.9 MΩ Resolution: 0.1 MΩ
	Range: 1,000 MΩ – 50,000 MΩ Resolution: 1 MΩ (HI-Limit: 0=OFF)
Ramp Timer	Ramp-up: 0.1 – 999.9 sec Ramp-Down: 0.0, 1.0 – 999.9 sec (0=Continuous)
Delay Timer	Range: 0.5 – 999.9 sec (0=Continuous)

GROUND BOND TEST MODE	
Output Voltage (Open Circuit Limit)	Range: 3.00 – 8.00 VAC
Output Frequency	Range: 60 or 50 Hz, User Selectable
Output Current	Range: 1.00 – 40.00 A Resolution: 0.01 A Accuracy: ± (2% of setting + 0.02 A)
Maximum Loading	1.00 – 10.00 A, 0 – 600 mΩ 10.01 – 30.00 A, 0 – 200 mΩ 30.01 – 40.00 A, 0 – 150 mΩ
HI and LO-Limit	Range: 0 – 150 mΩ for 30.01 – 40.00 A 0 – 200 mΩ for 10.01 – 30.00 A 0 – 600 mΩ for 1.00 – 10.00 A Resolution: 1 mΩ Accuracy: ± (2% of reading + 2 mΩ)
	Range: 0 – 600 mΩ for 1.00 – 5.99 A Resolution: 1 mΩ Accuracy: ± (3% of reading + 3 mΩ)
	Dwell Timer
Milliohm Offset	Range: 0 – 200 mΩ
CONTINUITY TEST MODE	
Output Current	DC 0.01 A ± 0.00001 A
Resistance Display	Range: 0.00 – 10000 Ω
HI and LO-Limit	Range: 1: 0.00 – 10.00 Ω Resolution: 0.01 Ω
	Range 2: 10.1 – 100.0 Ω Resolution: 0.1 Ω
	Range 3: 101 – 1,000 Ω Resolution: 1 Ω Accuracy: ± (1% of reading + 3 counts)
	Range 4: 1,001 – 10,000 Ω Resolution: 1 Ω Accuracy: ± (1% of reading + 10 counts) (Max Limit: 0=OFF)
Dwell Timer	Range: 0.0, 0.3 – 999.9 sec (0=Continuous)
Milliohm Offset	Range: 0.00 – 10.00 Ω
RUN TEST MODE (Models 82X6 & 82X7 only)	
DUT Power	Voltage: 0 – 277 VAC single phase unbalanced Current: 16 AAC max continuous Range: 0.0 – 277.0 VAC Full Scale Resolution: 0.1 V Accuracy: ± (1.5% of reading + 0.2 V), 30.0 – 277.0 VAC Short Circuit Protection: 23 AAC, Response Time < 3 sec
Delay Time Setting	Range: 0.2 – 999.9 seconds
Dwell Time Setting	Range: 0.1 – 999.9 seconds (0=Continuous)

**RUN TEST MODE CONTINUED (Models 82X6 & 82X7 only)**

<b>Trip Point Settings &amp; Metering</b>	<b>Voltage</b>		
	Volt-Hi Volt-LO	Range: Resolution: Accuracy:	30.0 – 277.0 VAC 0.1 V ± (1.5% of setting + 0.2 V), 30.0–277 VAC
	<b>Current</b>		
	Amp-HI Amp-LO	Range: Resolution: Accuracy:	0.0 – 16.00 AAC 0.01 A ± (2.0% of setting + 2 counts)
	<b>Watts</b>		
	Power-HI Power-LO	Range: Resolution: Accuracy:	0 – 4,500 W 1 W ± (5.0% of setting + 3 counts)
	<b>Power Factor</b>		
	PF-HI PF-LO	Range: Resolution: Accuracy:	0.000 – 1.000 0.001 ± (8% of setting + 2 counts)
	<b>Leakage Current</b>		
	Leak-HI Leak-LO	Range: Resolution: Accuracy:	0.00 – 10.00 mA (0=OFF) 0.01 mA ± (2% of setting + 2 counts)
<b>Timer Display</b>	Range: Resolution: Accuracy:	0.0 – 999.9 seconds 0.1 second ± (0.1% of reading + 0.05 seconds)	

**LEAKAGE CURRENT TEST MODE (Models 82X6 & 82X7 only)**

<b>DUT Power</b>	Voltage: Current:	0 – 277 VAC 16 AAC max continuous	
	Voltage Display	Range: Resolution: Accuracy:	0.0 – 277.0 VAC Full Scale 0.1 V ± (1.5% of reading +0.2 V), 30.0 – 277.0 VAC
	Short Circuit Protection:	23 AAC, Response Time < 3 s	
<b>Reverse Power Switch</b>	Reverse polarity switch setting select ON/OFF/AUTO ON: Reverse power OFF: Normal AUTO: Automatic Reverse Polarity		
<b>Neutral Switch</b>	ON/OFF selection for single fault condition		
<b>Ground Switch</b>	ON/OFF selection for Class I single fault condition		
<b>Probe Setting</b>	Surface to Surface (PH – PL) Surface to Line (PH – L) Ground to Line (G – L)		
<b>Touch Current High Limit (rms)</b>	Range: Resolution:	0.0 µA ~ 999.9 µA 1000 µA ~ 10.00 mA 0.1 µA / 1 µA / 0.01 mA	

**LEAKAGE CURRENT TEST MODE CONTINUED (Models 82X6 & 82X7 only)**

<b>Touch Current Display (rms)</b>	Range 1:	0.0 µA ~ 32.0 µA, frequency DC, 15 Hz – 1 MHz	
	Range 2:	28.0 µA ~ 130.0 µA, frequency DC, 15 Hz – 1 MHz	
	Range 3:	120.0 µA ~ 550.0 µA, frequency DC, 15 Hz – 1 MHz	
	Resolution for Ranges 1, 2, 3:	0.1 µA	
	Accuracy for Ranges 1, 2, 3:	DC: 15 Hz < f < 100 KHz: ± (2% of reading + 3 counts) 100 KHz < f < 1 MHz: ± 5% of reading (10.0 µA – 999.9 µA)	
	Range 4:	400 µA ~ 2100 µA, frequency DC, 15 Hz – 1 MHz	
	Range 5:	800 µA ~ 8500 µA, frequency DC, 15 Hz – 1 MHz	
	Resolution for Ranges 4 & 5:	1 µA	
	Accuracy for Ranges 4 & 5:	DC: 15 Hz < f < 100 KHz: ± (2% of reading + 3 counts) 100 KHz < f < 1 MHz: ± 5% of reading (10 µA – 8500 µA)	
	Range 6:	8.00 mA ~ 10.00 mA, frequency DC 15 Hz – 100 kHz	
Resolution:	0.01 mA		
Accuracy:	DC: 15 Hz < f < 100 KHz: ± 5% of reading (0.01 mA -10.00 mA)		
<b>Touch Current Display (Peak)</b>	Range 1:	0.0 µA ~ 32.0 µA, frequency DC – 1 MHz	
	Range 2:	28.0 µA ~ 130.0 µA, frequency DC – 1 MHz	
	Range 3:	120.0 µA ~ 550.0 µA, frequency DC – 1 MHz	
	Resolution for Ranges 1, 2, 3:	0.1 µA	
	Accuracy for Ranges 1, 2, 3:	DC: ± (2% of reading + 2 µA) 15 Hz < f < 1 MHz: ± 10% of reading + 2 µA	
	Range 4:	400 µA ~ 2100 µA, frequency DC – 1 MHz	
	Range 5:	1800 A ~ 8500 µA, frequency DC – 1 MHz	
	Resolution for Ranges 4 & 5:	1 µA	
	Accuracy for Ranges 4 & 5:	DC: ± (2% of reading + 2 µA) 15 Hz < f < 1 MHz: ±(10% of reading + 2 µA)	
	Range 6:	8.0 mA ~10.00 mA, frequency DC – 100 KHz	
Resolution:	0.01 mA		
Accuracy:	DC: ± (2% of reading + 3 counts) 15 Hz < f < 100 KHz: ± (10% of reading + 2 counts)		
<b>MD Circuit Module</b>	MD1: UL544NP, UL484 , UL923, UL471, UL867, UL697 MD2: UL544P MD3: IEC 60601-1 MD4: UL1563 MD5: IEC60990 Fig4 U2, IEC 60950-1, IEC60335-1, IEC60598-1, IEC60065, IEC61010 MD6: IEC60990 Fig5 U3, IEC60598-1 MD7: IEC60950, IEC61010-1 FigA.2 (2K ohm) for Run function MD8: IEC60990/60950 Fig4 U1		
<b>External MD</b>	Basic measuring element 1 kΩ		
<b>Scope Output Interface</b>	BNC type connector on rear panel for Oscilloscope connection		

AC POWER SOURCE (82X7 only)	
<b>Output</b>	Power: 630 VA and 500 W Maximum
	Voltage: 0 – 150.0 V / 0 – 277.0 V
	Current: 4.20 A maximum for 0 – 150 V range 2.10 A maximum 0 – 277 V range
	Distortion: ≤ 1% at 45- 500 Hz and output voltage within the 80 ~ 140 VAC at Low Range or the 160 ~ 277 VAC at High Range (Resistive Load)
	Regulation: ≤ 0.5% + 5 V (resistive load), from no load to full load and Low Line to High Line (combined regulation)
	Crest Factor: > 3
	Test Timing: < 350 ms at start and between
	Limit: Steps when internal AC source is ON
<b>Settings</b>	Voltage
	Low Range: 0.0 – 150.0 V
	High Range: 0.0 – 277.0 V
	Resolution: 0.1 V
	Accuracy: ± (1.5% of setting + 2 counts)
	Frequency
	Range: 45.0 Hz – 99.9 Hz Resolution: 0.1 Hz Accuracy: ± 0.1% of setting
Range: 100 Hz – 500 Hz Resolution: 1 Hz Accuracy: ± 0.1% of setting	
A-HI-Limit	
Range: 4.20 A / 2.10 A Resolution: 0.01 A Accuracy: ± (2% of reading + 2 counts)	
<b>Measurement</b>	Voltage
	Range: 0.0 – 277.0 V Resolution: 0.1 V Accuracy: ± (1.5% of reading + 2 counts)
	Current
	Range: 0.00 – 16.00 A Resolution: 0.01 A Accuracy: ± (2% of reading + 2 counts)
	Power:
Range: 0 – 4500 Resolution: 1 Accuracy: ± (5% of reading + 3 counts) for PF > 0.100	
Power Factor:	
Range: 0.000 – 1.000 Resolution: 0.001 Accuracy: ± (8% of reading + 5 counts)	
Frequency:	
Range: 45 – 500 Hz Resolution: 0.1 Hz Accuracy: ± 0.1 Hz	

GENERAL SPECIFICATIONS									
<b>PLC Remote Control</b>	Input: Test, Reset, Interlock, Recall File 1 through 3 Output: Pass, Fail, Test-in-Process								
<b>Safety</b>	Built-in SmartGFI circuit								
<b>Memory</b>	10,000 Steps								
<b>Interface</b>	Standard: USB/RS-232 Optional: Ethernet or GPIB								
<b>Security</b>	Advanced security system with access levels and username/password requirements								
<b>Dimensions (W x H x D)</b>	16.93" x 5.24" x 19.69" (430 x 133 x 500 mm)								
<b>Weight</b>	<table border="0"> <tr> <td>8204:</td> <td>82 lbs (37 kg)</td> </tr> <tr> <td>8254:</td> <td>92 lbs (42 kg)</td> </tr> <tr> <td>8206/8207:</td> <td>83 lbs (38 kg)</td> </tr> <tr> <td>8256/8257:</td> <td>103 lbs (47 kg)</td> </tr> </table>	8204:	82 lbs (37 kg)	8254:	92 lbs (42 kg)	8206/8207:	83 lbs (38 kg)	8256/8257:	103 lbs (47 kg)
8204:	82 lbs (37 kg)								
8254:	92 lbs (42 kg)								
8206/8207:	83 lbs (38 kg)								
8256/8257:	103 lbs (47 kg)								

**Why We Use Counts**

Associated Research publishes some specifications using “counts” which allows us to provide a better indication of the instrument’s capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

**Specifications subject to change without notice.**

# HYAMP®

The Industry Leading Production Line Ground Bond Instrument



Our new HYAMP® Series provides manufacturers with data-driven results and greater test flexibility required in today's complex test environment. Quickly collect test data and test settings from the convenient front panel USB port onto a standard USB flash drive. Use the front panel barcode connection to associate products with preprogrammed test files. Test with greater flexibility by performing either AC Ground Bond or DC Ground Bond at a maximum of 40 A of current. The new HYAMP® features a drastically reduced weight and footprint making it the ideal lightweight Ground Bond solution for laboratory and production line testing applications. Easily interconnect with the Hypot® Series to form a complete safety compliance system.



## Find the Model that Fits Your Testing Needs



Ground Bond

NEW 2017 3240

AC/DC

## AVAILABLE INTERFACES



USB

## SAFETY & PRODUCTIVITY FEATURES



**PLC Remote**  
Basic PLC relay control



**Remote Safety Interlock**  
Easily disable HV output



**Data Transfer**  
Easily import/export test files and data via USB



**Barcode Capability**  
Direct barcode connection



**Multiple Languages**  
Multi-Language user interface



**Ground Bond Voltage Drop**  
Monitor voltage drop vs resistance



**FailCHEK™**  
Confirms failure detection



**Prompt & Hold**  
Provides alerts & instructions between tests



**Advanced User Security**  
Customize ID & password protection



**Accredited Cal**  
Accredited calibration options available



**4-Wire Measurement**  
More accurate milliohm measurement



**Interconnection**  
Interconnect with Hypot® to form a complete test system



**On Board Data Storage**  
Save up to 1,500 Test Results on-board

INPUT SPECIFICATIONS		GENERAL SPECIFICATIONS	
Voltage	100 – 120 VAC / 200 – 240 VAC ± 10% Auto Range		
Frequency	50/60Hz ± 5%		
Fuse	10 A, Slow Blow 250 VAC		
GROUND BOND TEST MODE			
Output Voltage (Open Circuit Voltage)	Range: Resolution: Accuracy:	3.00 – 8.00 VAC/DC 0.01 VAC/DC ± (3% of setting + 3 counts)	
Output Frequency	50 or 60 Hz, User Selectable/DC		
Output Current	Range: Resolution: Accuracy:	0 – 150 mΩ for 30.01 – 40.00 A 0 – 200 mΩ for 10.01 – 30.00 A 0 – 600 mΩ for 1.00 – 10.01 A 0.1 A ± (3% of setting + 3 counts)	
Maximum Loading	Range: Resolution: Accuracy:	1.00 – 10.00 A, 0 – 600 mΩ 10.01 – 30.00 A, 0 – 200 mΩ 30.01 – 40.00 A, 0 – 150 mΩ 1 mΩ ± (2% of setting + 2 counts)	
HI and LO-Limit Resistance	Range: Resolution: Accuracy:	0 – 150 mΩ for 30.01 – 40.00 A 0 – 200 mΩ for 10.01 – 30.00 A 0 – 600 mΩ for 1.00 – 10.01 A 1 mΩ ± (2% of setting + 2 counts)	
HI and LO-Limit Voltage	Range: Resolution: Accuracy:	0.00 – 6.00 V 0.01 ± (2% of settings + 2 counts)	
Dwell Time Setting	Range:	0, 0.5 – 999.9 sec (0=Continuous)	
Ω Offset Capability	Range: Resolution: Accuracy:	0 – 100 mΩ 1 mΩ ± (2% of setting + 2 counts)	
V Offset Capability	Range: Resolution: Accuracy:	0.00 – 4.00 V 0.01 V ± (2% of setting + 2 counts)	
Current Display	Range: Resolution: Accuracy:	0.00 – 40.00 AAC/DC 0.01 AC/DC ± (3% of reading + 1 count)	
Voltage Display	Range: Resolution: Accuracy:	0.00 – 8.00 VAC/DC 0.01 AC/DC ± (2% of reading + 2 counts)	
Ohmmeter Display	Range: Resolution: Accuracy:	0 – 600 mΩ for 1.00 – 5.99 A 1 mΩ ± (3% of reading + 3 counts)	
	Range: Resolution: Accuracy:	0 – 600 mΩ for 6 – 40 A 1 mΩ ± (2% of reading + 2 counts)	
Remote Control and Signal I/O	The following input and output signals are provided through two 9 pin D type connectors: Inputs: Test, Reset, Hardware Interlock, File Recall Outputs: Pass, Fail, Test-in-Process, Reset-Out, Start-Out  Hardware Interlock (safety)		
Memories	50 steps 1500 test results		
Interface	USB standard		
Language	English, Traditional Chinese, Simplified Chinese, Turkish, Portuguese, Spanish, German, French		
Security	Multiple user setups with ID and password		
Dimensions (W x H x D)	8.5" x 3.5" x 11.9" (215 x 88.1 x 300 mm)		
<b>Why We Use Counts</b>			
Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.			
<b>Specifications subject to change without notice.</b>			

# HypotMAX<sup>®</sup>

The Safest and Most Reliable Automated High Voltage Hipot Instrument Available



Our HypotMAX<sup>®</sup> Series is a complete line of automated Hipot instruments designed to meet the demanding requirements of high voltage applications. We've included our patented SmartGFI<sup>®</sup> feature for maximum operator safety as well as a variety of advanced features to increase productivity on the production line and in the lab. Set up and run tests with confidence from our intuitive user interface or automate with a PC.



## AVAILABLE INTERFACES



USB



RS-232



GPIB  
(Optional)

## SAFETY & PRODUCTIVITY FEATURES



**SmartGFI<sup>®</sup>**  
Automatic operator shock protection



**Remote Safety Interlock**  
Easily disable HV output



**PLC Remote**  
Basic PLC relay control



**Ramp-HI<sup>®</sup>**  
Reduce ramp time during DC Hipot



**Charge-LO<sup>®</sup>**  
Confirms proper DUT connection



**Arc Detection**  
High frequency filter for corona detection



**Accredited Cal**  
Accredited calibration options available



**Autoware<sup>®</sup>**  
Use with automation software control

## Find the Model that Fits Your Testing Needs



AC Hipot



DC Hipot

7705	•	
7710		•
7715	•	
7720		•

INPUT SPECIFICATIONS	
Voltage	115/130 VAC ± 10%, Single Phase, User Selection
Frequency	50/60 Hz ± 5%
Fuse	6.3 A, 250 V Slow Blow
DIELECTRIC WITHSTAND TEST MODE	
Output Rating	7705: 10 kV @ 20 mAAC 7710: 12 kV @ 10 mADC 7715: 20 kV @ 10 mAAC 7720: 20 kV @ 5 mADC
HI-Limit and LO-Limit	7705 Range 1: 0.0 – 9,999 mA Resolution: 0.001 mA Range 2: 10.00 – 20.00 mA Resolution: 0.01 mA
	7710 Range 1: 0.00 – 999.9 µA Resolution: 0.1 µA Range 2: 1,000 – 9,999 µA Resolution: 1 µA
	7715 Range: 0.00 – 9,999 mA Resolution: 0.001 mA
	7720 Range 1: 0.0 – 999.9 µA Resolution: 0.1 µA Range 2: 1,000 – 5,000 µA Resolution: 1 µA/step
	77XX Accuracy: ± (2% of setting + 2 counts)
DC Ramp HI	7710 13 mA peak maximum, 10 mADC, ON/OFF selectable
	7720 6.75 mA peak maximum, 5 mADC, ON/OFF selectable
DC Charge LO	7710/7720 Range: 0.0 – 350 µADC or auto set
Arc Detection	7705 1 – 9 at output voltage < 7.00 kV 1 – 8 at output voltage ≥ 7.00 kV
	7710/7720 1 – 9
	7715 1 – 9 at output voltage < 15.00 kV 1 – 7 at output voltage ≥ 15.00 kV
Voltage Display	7705 Range: 0.00 – 10.00 kV Full scale Accuracy: ± (2% of reading + 20 V)
	7710 Range: 0.00 – 12.00 kV Full scale Accuracy: ± (2% of reading + 20 V)
	7715/7720 Range: 0.00 – 20.00 kV Full scale Accuracy: ± (2% of reading + 20 V)
Current Display	7705 Auto Range Range 1: 0.000 – 3.500 mA Range 2: 3.00 – 20.00 mA
	7710 Auto Range Range 1: 0.0 – 350.0 µA Range 2: 300 – 3500 µA Range 3: 3,000 – 9,999 µA
	7715 Auto Range Range 1: 0.000 – 3.500 mA Range 2: 3.00 – 10.00 mA
	7720 Auto Range Range 1: 0.0 – 350.0 µA Range 2: 300 – 5,000 µA
DC Output Ripple	7710 < 5% Ripple at 12 kV @ 9,999 µA, Resistive Load
	7720 < 5% Ripple at 20 kV @ 4,999 µA, Resistive Load
AC Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5
Output Frequency	Range: 50/60 Hz, User Selection ± (1% of output + 5 V) from Regulation No load to full load
Output Regulation	± (1% of output + 10 V) from no load to full load
Discharge Timer	7710 No load < 400 ms
	7720 No load < 500 ms
Dwell Timer	Range: 0, 0.3 – 999.9 sec (0=Continuous) AC Range: 0, 0.3 – 999.9 sec or min (0=Continuous) DC Range: 0, 0.4 – 999.9 sec or min (0=Continuous)
Ramp Timer	7705/7715 Range: 0.3 – 999.9 sec
	7710/7720 Range: 0.4 – 999.9 sec
Ground Continuity	Max. Ground Resistance 1 Ω ± 0.1 Ω, fixed

DIELECTRIC WITHSTAND TEST MODE	
Ground Fault Interrupt	HV Shut Down Speed < 1 ms GFI Trip Current 1 mA max
GENERAL SPECIFICATIONS	
Memory	50 memories w/ 8 steps per memory
Mechanical	Tilt-up front feet
Interface	Standard: USB, RS-232 Optional: GPIB
Dimensions (W x H x D)	16.93" x 5.24" x 15.75" (430 x 133 x 400 mm)
Weight	7705/7710: 61.65 lbs (28 kg)
	7710/7720: 48.9 lbs (22 kg)

#### Why We Use Counts

Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

Specifications subject to change without notice.

# SC6540

The Patented Multiplexer that Revolutionized Production Line and Laboratory Electrical Safety Compliance Testing



Our patented SC6540 multiplexer pioneered the largest productivity improvement in the electrical safety compliance industry in years. With up to 16 independent high voltage or high current channels in a convenient 2U design, the SC6540 can be customized in 10 different configurations for multi-point Hipot, Ground Bond, Insulation Resistance, and Leakage Current testing. Configure the SC6540 according to your needs, and interface with your OMNIA® II, HypotULTRA® or LINECHEK® II instrument to improve production line throughput or expand lab testing capability. Operate from the front panel of your AR instrument or utilize a variety of automation interfaces for direct PC control.



## Find the Model that Fits Your Testing Needs



High Voltage



High Current



8 Channel



16 Channel

HN	•		•	
HH	•			•
HG	•	•		•
GN		•	•	
GG		•		•

Available in both master and slave configurations

## AVAILABLE INTERFACES



USB



RS-232



Ethernet  
(Optional)



GPIB  
(Optional)

## PRODUCTIVITY ENHANCING FEATURES



**BatchTEST®**  
Simultaneous  
DUT testing  
with AW2



**Interconnection**  
Interconnect  
with the  
HypotULTRA®,  
OMNIA® II or  
LINECHEK® II to  
form a complete  
test system



**Autaware®3**  
Advanced  
Automation  
Control  
Software

## FOR USE WITH THE FOLLOWING TESTS



AC Hipot



DC Hipot



Ground Bond



Ground  
Continuity



Insulation  
Resistance



Leakage  
Current

**MODULAR MULTIPLEXER SPECIFICATIONS**

<b>Input (Master only)</b>	115 VAC (± 10%), 50/60 Hz, single phase 230 VAC (± 10%), 50/60 Hz, single phase User selectable
<b>Fuse (Master only)</b>	250 V/2 A/fast-blow
<b>PC Control (Master only)</b>	Standard: USB, RS-232 Optional: Ethernet, GPIB
<b>Multiplexer Control</b>	Master: One Multiplexer bus output controls, up to 4 additional slaves Slave: One output and one input
<b>Maximum HV Rating</b>	5 kV AC and DC
<b>Maximum HC Rating</b>	40 A
<b>Number of Possible Channels</b>	8 or 16
<b>HV Output</b>	100' reel HV cable rated for up to 30 kV Terminations with 8 HV connectors
<b>GND Output</b>	20 terminals provided, to accept 10/12 AWG Terminations hook-up wire (user supplied wire)
<b>Temperature</b>	32° – 104° F (0° – 40° C)
<b>Humidity</b>	0 – 80%
<b>Altitude</b>	6,560 ft. (2,000 m)
<b>Mechanical</b>	2U with tilt-up front feet
<b>Dimensions (W x H x D)</b>	17" x 4.07" x 12.96" (432 x 103 x 329 mm)
<b>Weight</b>	Master: 20.05 lbs. max. (9.09 kg) (with 2 high voltage modules) Slave: 15.45 lbs. max. (7.01 kg) (with 2 high voltage modules)

**CONFIGURATIONS**

The modular design can be customize to fit your application. In addition to master or slave control, the SC6540 can be set up in the following configurations: 8 or 16 high voltage channels, 8 or 16 high current channels, and 8 high voltage channels and/or 8 high current channels. Refer to the images for details.

The different configurations (shown below) are indicated by the following alpha designators

- M – Master Multiplexer
- H – 8 High Voltage Channels
- HH – 16 High Voltage Channels
- G – 8 Ground Bond Channels
- GG – 16 Ground Bond Channels
- N – Empty Module
- S – Slave



**MODEL SC6540 HNM\***  
8 Channel High Voltage Multiplexer



**MODEL SC6540 HHM\***  
16 Channel High Voltage Multiplexer



**MODEL SC6540 HGM\***  
8 Channel High Voltage Multiplexer  
8 Channel High Current Multiplexer



**MODEL SC6540 GNM\***  
8 Channel High Current Multiplexer



**MODEL SC6540 GGM\***  
16 Channel High Current Multiplexer

\*Also available in slave configuration

# LINECHEK® II

The Fully Automated Line Leakage Current Instrument that Changed the Industry



Our LINECHEK® II model 620L provides 7 measuring devices (MD's) compliant with international certification bodies as well as a convenient switching network to simulate all 8 required fault conditions, everything you need for full Leakage Current compliance. Utilize the intuitive user interface or control via a PC for more advanced automated applications that require data storage and analysis. The 620L handles up to 40 A of continuous current and can be interfaced to an SC6540 modular multiplexer for multi-point testing. Interconnect the 620L to an OMNIA® II instrument to form a complete electrical safety compliance testing system.

## AVAILABLE INTERFACES



USB



RS-232



Ethernet  
(Optional)



GPIB  
(Optional)

## SAFETY & PRODUCTIVITY FEATURES



**Prompt & Hold**  
Provides alerts & instructions between tests



**Remote Safety Interlock**  
Easily disable HV output



**Active Link®**  
Continuous power during test steps



**PLC Remote**  
Basic PLC relay control




**Modular Multiplexer**  
Compatible with SC6540 multiplexers



**Interconnection**  
Interconnect with OMNIA® II or HypotULTRA® to form a complete test system



**Cal-Alert®**  
Tracks and alerts for calibration

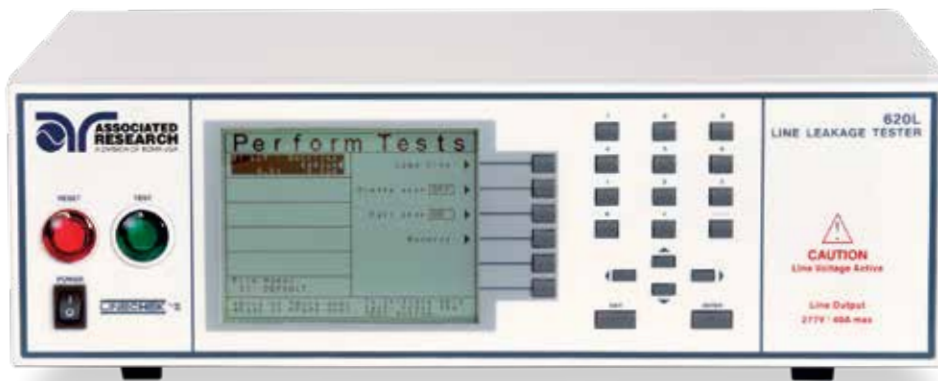

## Find the Model that Fits Your Testing Needs



Leakage Current



Functional Run



Power Source Recommended

620L

•

•

•

INPUT SPECIFICATIONS	
Voltage	115/230 VAC ± 10%, User Selection
Frequency	50/60 Hz ± 5%
Fuse	2 A Slow Blow 250 VAC
LINE CONDITIONS	
Reverse Power Switch	Switch for power polarity reversal
Neutral Switch	Neutral switch on/off selection for single fault
Ground Switch	Ground switch on/off selection for class I single fault
PROBE SETTINGS	
Surface to Surface	(PH – PL)
Surface to Line	(PH – L)
Ground to Line	(G – L)
LEAKAGE LIMIT SETTINGS	
Touch Current High/Low Limit (rms)	Range: 0.0 µA – 999.9 µA / 1,000 µA – 9,999 µA / 10.00 mA – 20.00 mA Resolution: 0.1 µA / 1 µA / 0.01 mA
Touch Current High/Low Limit (Peak)	Range: 0.0 µA – 999.9 µA / 1,000 µA – 9,999 µA / 10.00 mA – 30.00 mA Resolution: 0.1 µA / 1 µA / 0.01 mA
DISPLAY	
Touch Current Display (rms)	Range: 0.0 µA – 550 µA, frequency DC, 15 Hz – 1 MHz Resolution: 0.1 µA Accuracy: DC: 15 Hz ≤ f ≤ 100 kHz: ± (2% of reading + 3 counts) 100 kHz ≤ f ≤ 1 MHz: ± 5% of reading (10.0 µA – 999.9 µA)
	Range: 400 µA – 8,500 µA, frequency DC, 15 Hz – 1 MHz Resolution: 1 µA Accuracy: DC: 15 Hz ≤ f ≤ 100 kHz: ± (2% of reading + 3 counts) 100 kHz ≤ f ≤ 1 MHz: ± 5% of reading (10.0 µA – 8,500 µA)
	Range: 8.00 mA – 20.00 mA, frequency DC, 15 Hz – 100 KHz Resolution: 0.01 mA Accuracy: DC: 15 Hz ≤ f ≤ 100 MHz: ± 5% of reading (0.01 mA – 20.00 mA)
Touch Current Display (peak)	Range: 0.0 µA – 550 µA, frequency DC – 1 MHz Resolution: 0.1 µA Accuracy: ± (2% of reading + 2 µA) 15 Hz ≤ f ≤ 1 MHz, ± 10% of reading + 2 µA
	Range: 400 µA – 8,500 µA, frequency DC – 1 MHz Resolution: 1 µA Accuracy: ± (2% of reading + 2 µA) 15 Hz ≤ f ≤ 1 MHz, ± 10% of reading + 2 µA
	Range: 8.00 mA – 30.00 mA, frequency DC – 100 kHz Resolution: 0.01 mA Accuracy: ± (2% of reading + 3 counts) 15 Hz ≤ f ≤ 100 kHz, ± 10% of reading + 2 counts
MEASURING DEVICE MODULE	
MD1	UL544NP, UL484 , UL923, UL471, UL867, UL697
MD2	UL544P
MD3	IEC 60601-1
MD4	UL1563
MD5	IEC60990 Fig4 U2, IEC60950-1, IEC60335-1, IEC60598-1, IEC60065, IEC61010
MD6	IEC60990 Fig5 U3, IEC60598-1
MD7	IEC60950, IEC61010-1 FigA.2 (2 kohm) for Run function
External MD	Basic measuring element 1 kohm
MD Voltage Limit	70 VDC

DUT POWER	
AC Voltage	0.0 – 277.0 V
AC Current	40 A max continuous
AC Voltage High/Low Limit	Range: 0.0 – 277.0 V Resolution: 0.1 V/step
AC Voltage Display	Range: 0.0 – 277.0 V Resolution: 0.1 V/step Accuracy: ± (1.5% of reading + 2 counts), 30.0 – 277.0 V
Delay Time Setting	Range: 0.5 – 999.9 sec Resolution: 0.1 sec
Dwell Time Setting	Range: 0, 0.5 – 999.9 sec (0=Continuous) Resolution: 0.1 sec Accuracy: ± (0.1% of reading + 0.05 seconds)
Failure Protection	On Start-Up – Neutral Voltage Check (Neutral – V) Over current and ground current check (Line – OC)
GENERAL SPECIFICATIONS	
Memory	50 Memories, 30 steps per each memory File locations can link 900 steps max
Mechanical	Bench or rackmount with tilt-up feet
Interface	Standard: USB, RS-232 Optional: Ethernet, GPIB
Dimensions (W x H x D)	16.93" x 5.24" x 11.81" (430 x 133 x 300 mm)
Weight	26.45 lbs (12 kg)

**Why We Use Counts**

Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.

**Specifications subject to change without notice.**

# MedTEST


A Complete Electrical Safety Testing System that Satisfies the Most Demanding Medical Compliance Requirements



Our MedTEST system can be designed to provide complete test solution for medical device manufacturers in need of conforming to IEC 60601-1 3rd Edition Standard. Customize your MedTEST system to satisfy your individual testing requirements including Hipot, Ground Bond, Insulation Resistance, Functional Run and leakage current testing for all B, BF and CF type applied parts including Mains on Applied Parts (MOAP) tests. Up to 40 A of continuous DUT current combined with our Active Link® technology reduces overall test time and integration with our SC6540 modular multiplexer allows for multi-point sequential testing without the need to change test leads. Get the most from your test system by utilizing our Autoware®3 software for maximum productivity-enhancing benefits.



## AVAILABLE INTERFACES

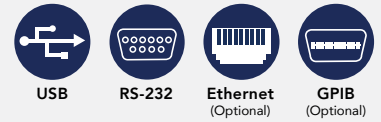

## SAFETY & PRODUCTIVITY FEATURES

- SmartGFI®**  
Automatic operator shock protection
- Remote Safety Interlock**  
Easily disable HV output
- Prompt & Hold**  
Provides alerts & instructions between tests
- Multiple Languages**  
Multi-Language user interface
- Active Link®**  
Continuous power during test steps
- My Menu**  
Customize your own shortcut menu
- DualCHEK®**  
Simultaneous Hipot and Ground Bond
- Internal Multiplexer**  
Available with optional HV multiplexer
- Modular Multiplexer**  
Compatible with SC6540 multiplexers
- FailCHEK™**  
Confirms failure detection
- Cal-Alert®**  
Tracks and alerts for calibration
- Ramp-HI®**  
Reduce ramp time during DC Hipot
- Charge-LO®**  
Confirms proper DUT connection
- Autoware®3**  
Advanced Automation Control Software
- Accredited Cal**  
Accredited calibration options available

- AC Hipot
- DC Hipot
- Ground Bond
- Ground Continuity
- Insulation Resistance
- Leakage Current
- Functional Run
- Power Source Recommended

# POPULAR MEDTEST CONFIGURATIONS



## OMNIA® II 8207 AND SC6540

- All in one testing system (Hipot, Ground Bond, Insulation Resistance, and Leakage Current)
- Built in 500 VA AC power source
- Efficient use of rack space
- SC6540 provides automated multi-point testing  
Most common applications incorporate 8 or 16 port multiplexers



## OMNIA® II 8206, SC6540 AND POWERED BY AN AC POWER SOURCE

- All in one testing system (Hipot, Ground Bond, Insulation Resistance, and Leakage Current)
- Compatible APT power source provides power to DUT\*  
Available power ratings: 500 VA – 6 kVA
- SC6540 provides automated multi-point testing.  
Most common applications incorporate 8 or 16 port multiplexers

\*Choose from APT 300XAC, 7000 or 6000 Series.



## OMNIA® II 8204, 620L, SC6540 AND POWERED BY AN AC POWER SOURCE

- All in one testing system (Hipot, Ground Bond, Insulation Resistance, and Leakage Current)
- Compatible APT power source provides power to DUT\*  
Available power ratings: 500 VA – 6 kVA
- SC6540 provides automated multi-point testing  
Most common applications incorporate 8 or 16 port multiplexers
- Up to 40 A continuous current capability for applications that draw greater than 16 A of current

\*Choose from APT 300XAC, 7000 or 6000 Series.

LINE CONDITIONS	
Reverse Power Switch	Switch for power polarity reversal
Neutral Switch	Neutral switch on/off selection for single fault
Ground Switch	Ground switch on/off selection for class I single fault
PROBE SETTINGS	
Surface to Surface	(PH – PL)
Surface to Line	(PH – L)
Ground to Line	(G – L)
LEAKAGE LIMIT SETTINGS	
Touch Current High/Low Limit (rms)	Range: 0.0 µA – 999.9 µA / 1,000 µA – 9,999 µA / 10.00 mA – 20.00 mA Resolution: 0.1 µA / 1 µA / 0.01 mA
Touch Current High/Low Limit (Peak)	Range: 0.0 µA – 999.9 µA / 1,000 µA – 9,999 µA / 10.00 mA – 30.00 mA Resolution: 0.1 µA / 1 µA / 0.01 mA
MEASURING DEVICE MODULE	
MD1	UL544NP, UL484 , UL923, UL471, UL867, UL697
MD2	UL544P
MD3	IEC 60601-1
MD4	UL1563
MD5	IEC60990 Fig4 U2, IEC60950-1, IEC60335-1, IEC60598-1, IEC60065, IEC61010
MD6	IEC60990 Fig5 U3, IEC60598-1
MD7	IEC60950, IEC61010-1 FigA.2 (2 kohm) for Run function
External MD	Basic measuring element 1 kohm
MD Voltage Limit	70 VDC
DUT POWER	
AC Voltage	0.0 – 277.0 V
AC Current	40 A max continuous
AC Voltage High/Low Limit	Range: 0.0 – 277.0 V Resolution: 0.1 V/step
AC Voltage Display	Range: 0.0 – 277.0 V Resolution: 0.1 V/step Accuracy: ± (1.5% of reading + 2 counts), 30.0 – 277.0 V
Delay Time Setting	Range: 0.5 – 999.9 sec Resolution: 0.1 sec
Dwell Time Setting	Range: 0, 0.5 – 999.9 sec (0=Continuous) Resolution: 0.1 sec Accuracy: ± (0.1% of reading + 0.05 seconds)
Failure Protection	On Start-Up – Neutral Voltage Check (Neutral – V) Over current and ground current check (Line – OC)

DIELECTRIC WITHSTAND TEST MODE			
Output Rating*	5 kV @ 50 mAAC 6 kV @ 20 mADC		
Voltage Setting	Range: 0 – 5,000 VAC, 0 – 6,000 VDC Resolution: 1 V Accuracy: ± (2% of setting + 5 V)		
HI and LO-Limit	AC Total	Range:	0.000-9.999 mA
		Resolution:	0.001 mA
	AC Real	Accuracy:	± (2% of setting + 2 counts)
		Range:	10.00 – 50.00 mA
	DC	Resolution:	0.01 mA
		Accuracy:	± (2% of Setting + 2 counts)
DC	Range:	0.00 – 999.9 µA	
	Resolution:	0.1 µA	
DC	Accuracy:	± (2% of setting + 2 counts)	
	Range:	1,000 – 20,000 µA	
DC	Resolution:	1 µA	
	Accuracy:	± (2% of setting + 2 counts)	
Ramp HI	> 20 mA peak maximum, ON/OFF selectable		
Charge LO	Range:	0.000 – 350.0 µA or Auto Set	
DC Output Ripple	≤ 4% Ripple rms at 5 kVDC @ 20 mA, Resistive Load		
Discharge Timer	< 50 msec for no load, < 100 msec for capacitor load (All capacitance values in MAX load spec below)		
Maximum Capacitive Load	1 µF < 1 kV	0.08 µF < 4 kV	
	0.75 µF < 2 kV	0.04 µF < 6 kV	
	0.50 µF < 3 kV		
Output Frequency	50/60 Hz ± 0.1% , User Selection, 400/800 Hz Option		
AC Output Waveform	Sine Wave, Crest Factor = 1.3 – 1.5		
Output Regulation	± (1% of output + 5 V) from no load to full load and over input voltage range		
Dwell Timer	AC 0, 0.4 – 999.9 sec (0=Continuous) DC 0, 0.3 – 999.9 sec (0=Continuous)		
Ramp Timer	Ramp-Up AC: 0.1 – 999.9 Ramp-Down AC: 0.0-999.9 Ramp-Up DC: 0.4 – 999.9 Ramp-Down DC: 0.0, 1.0-999.9		
Ground Continuity	Current: DC 0.1 A ± 0.01 A, fixed Max. Ground Resistance: 1 Ω ± 0.1 Ω, fixed		
Ground Fault Interrupt	GFI Trip Current: 5.0 mA max HV Shut Down Speed: < 1 ms		

\*Output voltage limited to 3.5 kV with 620L option 03

CONTINUITY TEST MODE	
Output Current	DC 0.1 A ± 0.00001 A
Resistance Display	Range: 0.00 – 10,000.00 Ω
HI and LO-Limit	0.00 – 10,000 Ω
Dwell Timer	Range: 0.0, 0.3 – 999.9 sec (0=Continuous)
Milliohm Offset	Range: 0.00 – 10.00 Ω
GROUND BOND TEST MODE	
Output Voltage	Range: 3.00 – 8.00 VAC
Output Frequency	50/60 Hz ± 0.1%, User Selection
Output Current	Range: 1.00 – 40.00 A Resolution: 0.01 A Accuracy: ± (2 % of setting + 2 counts)
Output Regulation	± (1% of output + 0.02 A) Within maximum load limits, and over input voltage range
Maximum Loading	1.00 – 10.00 A, 0 – 600 mΩ 10.01 – 30.00 A, 0 – 200 mΩ 30.01 – 40.00 A, 0 – 150 mΩ
HI and LO-Limit	Range: 0 – 150 for 30.01 – 40.00 A
	Range: 0 – 200 for 10.01 – 30.00 A
	Range: 0 – 600 for 6.00 – 10.00 A
	Range: 0 – 600 for 5.99 – 1.00 A
	Resolution: 1 mΩ
	Accuracy: 6.00 – 40.00 A, ± (2% of setting + 2 Counts) 1.00 – 5.99 A, ± (3% of setting + 3 Counts)
Milliohm Offset	Range: 0 – 200 mΩ
INSULATION RESISTANCE TEST MODE	
Output Voltage	Range: 30 – 1,000 VDC
Charging Current	Maximum > 20 mA peak
HI and LO-Limit	Range: 0.05-99.99 MΩ Resolution: 0.01 MΩ
	Range: 100.0 – 999.9 MΩ Resolution: 0.1 MΩ
	Range: 1000 – 50,000 MΩ Resolution: 1 MΩ
Charge-LO	0.000 – 3.500 μA or Auto Set
Ramp Timer	Ramp Up: 0.1 – 999.9 secs
	Ramp Down: 0.0, 1.0 – 999.9 secs
Dwell Timer	0, 0.5 – 999.9 (0=Continuous)
Delay Timer	0.5 – 999.9 secs
Ground Fault Interrupt	GFI Trip Current: 5.0 mA max HV Shut down Speed: < 1 ms

GENERAL SPECIFICATIONS	
Interface	Standard: USB, RS-232 Optional: Ethernet, GPIB
Safety	Built-in SmartGFI® circuit
Memory	620L: 50 memories, 30 steps per memory OMNIA® II: 10,000 steps
AC POWER SOURCE	
AC Power Source	Up-to 4 kVA compatible power sources available
Configuration	AC Power Source configuration depends on application.
	MedTEST hardware is configured for testing products with one side of the supply mains at earth potential (Fig 10 UL60601-1).
	MedTEST hardware is configured for unbalanced 0-277 V DUT input power.
	Custom Configurations available. Contact us for details.

**Why We Use Counts**

Associated Research publishes some specifications using "counts" which allows us to provide a better indication of the instrument's capabilities across measurement ranges. A count refers to the lowest resolution of the display for a given measurement range. For example, if the resolution for voltage is 1V then 2 counts = 2 V.










**Specifications subject to change without notice.**

# SYSTEMS

Production Line Electrical Safety Compliance in a Convenient Stackable or Rackable Configuration



Interconnect our Hypot® Series Hipot Instrument with our HYAMP® Series Ground Bond instrument to form a complete safety compliance system. Easily operate both instruments from a single point of control on the production line or in a rack. All test systems are safety agency listed, include interconnect cables, and detailed directions on effortlessly interconnecting your system.

	Hypot® 3805	Hypot® 3865	Hypot® 3870	Hypot® 3880
	 AC Hipot	  AC Hipot DC Hipot	   AC Hipot DC Hipot Insulation Resistance	  AC Hipot 500 VA
<b>HYAMP® 3240</b>  40A Ground Bond	System 32-05	System 32-65	System 32-70	System 32-80



## Boost Productivity with our Automation & Data Capturing Software

Compatible with OMNIA® II, HypotULTRA®, LINECHEK® II & SC6540

With a focus on safety and productivity, Autaware®3 revolutionizes the way electrical safety tests are performed!

Discover the benefits of Autaware®3 by taking it for a test drive with our **FREE 30 DAY TRIAL**. Visit [arisafety.com/autaware3](http://arisafety.com/autaware3) to download your copy today!



### Barcode Capability

Increase production throughput by incorporating a barcode scan. Autaware®3 fully supports direct barcode connection which enables the user to scan model and serial numbers that can be recorded in a data file.



### BatchTEST®

Shave minutes off your test routines by testing multiple DUT's simultaneously. Combined with a multiplexer, our BatchTEST® feature performs AC/DC Hipot, Continuity and Insulation Resistance tests on a batch of DUT'S in a convenient 1-step test.

## Features and Benefits

### Comprehensive Data Capture

Improve tractability and customize test results from multiple workstations anywhere on your network.

### Dymo and Zebra Printer Support

Print pass/fail information post test-sequence to label your DUT's with easily accessible test results.

### Insulation Resistance Batch Testing

Combined with a scanning matrix our BatchTEST® feature performs AC/DC Hipot, Continuity and Insulation Resistance tests on a batch of DUT'S at once.

### Concatenated Barcodes

Easily differentiate between model & serial number to quickly associate a DUT with a custom test sequence.

### DualCHEK® Print Report Functionality

Print Report will show both Ground Bond and ACW/DCW results when DualCHEK® is performed.

### Source Code Available

Customize Autaware®3 to fit your needs.



# ENSURE OPERATOR SAFETY WITH OUR WIDE SELECTION OF PERSONAL PROTECTIVE EQUIPMENT

Our PPE Accessories work to keep your employees safe and comply with OSHA 1910 Subpart S, NFPA 70E, and BS EN 50191:2010

## PPE Packages

The ideal all-in-one solution to protect your operators on the production line.



**Select** P/N 39865

Package includes Dual Palm Remote Switches, HV Warning Sign, and Insulation Mat.



**Plus** P/N 39564

Package includes Remote Test Box, Signal Tower Light, and Insulation Mat.



**Premium** P/N 39565

Package includes DUT Enclosure, Warning Sign, and Insulation Mat.

## DUT Enclosures

Our DUT Enclosures are designed to protect the operator from electric shock during testing. Interface an enclosure with our Remote Safety Interlock feature to automatically disable the instrument's output when the enclosure door is opened.

### Wood Frame with Foam Interior 39067

Outside dimensions (W x D x H):  
24" x 19" x 11.5" (610 x 483 x 293 mm)

Inside dimensions (W x D x H):  
20" x 16" x 10" (508 x 407 x 254 mm)

3/4" Walls, 3/4" Flame Retardant Foam,  
1/4" Plexiglass cover



### Plexiglass 39656

Outside dimensions (W x D x H):  
22" x 24" x 8.5" (559 x 610 x 216mm)

Inside dimensions (W x D x H):  
21.62" x 23.62" x 8.13" (549 x 600 x 207mm)

1/4" thick Plexiglass cover, 3/8" thick Plexiglass sides, top and bottom



## Dual Palm Remote Switch DPR-01

Using two-hand operation switches ensures operator safety because it forces you to place a hand on each switch and hold throughout the test.



## E-Stop ESTOP

Immediately stop the flow of electric current to your instrument when the E-Stop is triggered. The E-Stop provides the safest and fastest way for a rescuer to save an operator from injury.



## Red/Green Signal Tower Light 39560

Gives an indication as to the status of the testing area. A green light indicates the Hipot instrument is not outputting high voltage and the test area is safe. A red light indicates that the Hipot instrument is active and to stay clear of the test area.



# COMMON SAFETY STANDARD REFERENCE CHART

Standard/ Harmonized Standard	Testing Type	Dielectric Withstand			Ground Bond/Continuity			
		Test Voltage	Max I.	Test Time	Test Current	V Limit	Max. R	Test Time
IEC/UL 60601-1 3rd Edition Medical Electrical Equipment	Performance	500 – 4000 VAC or 707 – 5656 VDC	No Breakdown	60 s	10-25 A	≤ 6 V	≤ 0.1 Ω	5 s
	Production*	1000 – 3000 VAC		1 or 60 s	10-25 A	≤ 6 V	≤ 0.1 Ω	5 s
IEC 61730-2 UL 1703 Photovoltaic Modules & Panels	Performance	1000 VAC + 2 x rated V or 2000 VAC + 4 x rated V	50 uA	60 s	2.5 x Max Over Current Protection	≤ 12 V	≤ 0.1 Ω	120 s
	Production	1000 VAC + 2 x rated V or (1000 VDC + 2 x rated V) X 120%	50 uA	1 or 60 s		Continuity		
IEC 60335-1 Household Electrical Appliances	Performance	500 – 2400 VAC x rated V + 2400 VAC	No Breakdown	60 s	≥ 10 A	≤ 12 V	0.1 – 0.2 Ω	≤ 120 s
	Production	400 – 2500 VAC	5-30 mA	1 s	≥ 10 A	≤ 12 V	0.1 – 0.2 Ω	No time specified
UL 60335-1 Household Electrical Appliances	Performance	500V – 2400 VAC x rated V + 2400 VAC	No Breakdown	60 s	40 A	≤ 6.5 V	≤ 0.5 Ω	120 s
	Production	400 – 2500 VAC	5-30 mA	1 s	40 A	≤ 12 V	0.1 – 0.2 Ω	No time specified
IEC 60598-1 Luminaires	Performance	500 – 4 x rated V + 2000 VAC	No Breakdown	60 s	≥ 10 A	≤ 12 V	≤ 0.5 Ω	60 s
	Production	Not Specified – Responsibility of Manufacturer						
UL 1598 Luminaires	Performance	1000 VAC – 1000 VAC x 2 x rated V	No Breakdown	60 s	30 A	≤ 4 V	≤ 0.1 Ω	120 s
	Production	1200 VAC		1 s	Continuity		≤ 0.1 Ω	Continuity
IEC/UL 61010-1 & CSA 22.2 No. 61010-1 Laboratory Control Test & Measurement Equipment	Performance	840 – 11940 VAC or 1200 – 7500 VDC	No Breakdown	5 – 60 s	25 or 30 A	≤ 10 V or ≤ 12 V	≤ 0.1 Ω or < 4 V 0.133 Ω	60 or 120 s
	Production			5 s max ramp up 2 s dwell	Continuity			
EN 60204-1 Electrical Equipment of Machines	Performance	2 x rated V or 1000 VAC	No Breakdown	1 s	0.2 – 10 A	≤ 24 V	Refer to Section 18.2.2	No time specified
	Production	Not Specified – Responsibility of Manufacturer						
UL 2202 Electric Vehicle Charging System Equipment	Performance	500 VAC or 1000 VAC + 2 x rated V	No Breakdown	60 s	≤ 60 A	≤ 12 V	Continuity	120 – 240 s
	Production	1000 – 1700 VAC + 3.4 x rated V		60 or 1 s	Continuity			
IEC 61851-1 Electric Vehicle Conductive Charging System	Performance	1200 VAC + rated V or DC Equivalent	No Breakdown	60 s	Continuity			
	Production	Not Specified – Responsibility of Manufacturer						
UL 45A Portable Electrical Appliances	Performance	1000 VAC + 2 x rated V or DC equivalent	No Breakdown	60 s	Continuity			
	Production	1000 – 3000 VAC		1 s	Continuity			
EN 60950-1 EN 50116 Information Technology Equipment	Performance	1000 – 3000 VAC or 1414 – 4242 VDC	No Breakdown	120 s	30 A	≤ 12 V	≤ 0.1 Ω	60 s
	Production			1 – 4 s	25 A	≤ 12 V	≤ 0.1 Ω	1-4 s
UL 60950-1 CSA 22.2 No. 60950-1 Information Technology Equipment	Performance	1000 – 3000 VAC or 1414 – 4242 VDC	No Breakdown	60 s	≤ 40 A	≤ 12 V	≤ 0.1 Ω	60 s
	Production			1 – 6 s	Continuity			

\*As a result of performing risk analysis, many medical device manufacturers are performing leakage tests as part of 100% production line testing.

	Earth Leakage		Insulation Resistance			Suggested Model	Testing Type	Standard/ Harmonized Standard
	Test Voltage	Max I.	Test Time	V Limit	Min. R	AR Instrument		
	110% x rated V	5-10 mA		N/A		8206, 8207, 8256, 8257 or MedTEST	Performance	IEC/UL 60601-1 3rd Edition Medical Electrical Equipment
	110% x rated V	5-10 mA		N/A		7804 or 7854	Production*	
	Max rated V	10 uA – 1 mA	10 uA – 1 mA	500 VDC or Max rated V	40-400 MΩ	3240, 8206, 8207, 8256, 8257 or MedTEST	Performance	IEC 61730-2 UL 1703 Photovoltaic Modules & Panels
	N/A			N/A		3240, 3870 or 7850	Production	
	1.06 x rated V	0.25 – 5.0 uA		N/A		8256 or 8257	Performance	IEC 60335-1 Household Electrical Appliances
	N/A			N/A		7804	Production	
	1.06 x rated V	0.25 – 5.0 uA		N/A		8256 or 8257	Performance	UL 60335-1 Household Electrical Appliances
	N/A			N/A		7804	Production	
	Rated V	0.5 – 10 mA	60 s	500 VDC	1-4 MΩ	8206, 8207, 8256 or 8257	Performance	IEC 60598-1 Luminaires
	Not Specified – Responsibility of Manufacturer					Hypot® or 7850	Production	
	N/A		No time specified	500 VDC	≥ 2 MΩ	7804 or 7854	Performance	UL 1598 Luminaires
	N/A			N/A		Hypot® or 7850	Production	
	< 300 V	0.5 mA		N/A		8256, 8257 or MedTEST	Performance	IEC/UL 61010-1 & CSA 22.2 No. 61010-1 Laboratory Control Test & Measurement Equipment
	N/A			N/A		3865 or 7850	Production	
	N/A		No time specified	500 V	≥ 1 MΩ	7804 or 7854	Performance	EN 60204-1 Electrical Equipment of Machines
	Not Specified – Responsibility of Manufacturer					Hypot® or 7850	Production	
	Rated V	0.5 – 0.75 mA or 5 mA		N/A		8206, 8207, 8256, 8257 or MedTEST	Performance	UL 2202 Electric Vehicle Charging System Equipment
	N/A			N/A		Hypot® or 7850	Production	
	Touch Current Only		60 s	500 V	≥ 1 MΩ or ≥ 7 MΩ	8206, 8207, 8256, 8257 or MedTEST	Performance	IEC 61851-1 Electric Vehicle Conductive Charging System
	Not Specified – Responsibility of Manufacturer					Hypot® or 7850	Production	
	< 300 V	0.5 – 3.5 mA	60 s	500 V	≥ 50 KΩ	8206, 8207, 8256, 8257 or MedTEST	Performance	UL 45A Portable Electrical Appliances
	N/A			N/A		Hypot® or 7850	Production	
	< 300 V	0.25 – 3.5 mA	60 s	500 V	≥ 2 MΩ	8206, 8207, 8256, 8257 or MedTEST	Performance	EN 60950-1 EN 50116 Information Technology Equipment
	N/A			N/A		7804 or 7854	Production	
	< 300 V	0.25 – 3.5 mA	60 s	500 V	≥ 2 MΩ	8206, 8207, 8256, 8257 or MedTEST	Performance	UL 60950-1 CSA 22.2 No. 60950-1 Information Technology Equipment
	N/A			N/A		Hypot® or 7850	Production	



## HEADQUARTERS

13860 W. Laurel Drive  
Lake Forest, IL 60045 USA  
Telephone +1-847-367-4077  
Fax +1-847-367-4080  
Email [info@arisafety.com](mailto:info@arisafety.com)



---

## ASIA/PACIFIC

Telephone +60 3 7842 6097  
Fax +60 3 7842 6168

---

## CHINA

**GUANGZHOU AREA**  
Telephone +86-20-85533850  
Fax +86-20-85548933

**SUZHOU / SHANGHAI AREA**  
Telephone +86-512-68088360  
+86-512-68088361  
Fax +86-512-68088363



**We Have Local Sales Offices  
Throughout the World**

To find your nearest representative  
visit us at [arisafety.com](http://arisafety.com)