

Prana LT 160:

- Class A solid state
- Broadband (instantaneous single band): 20 MHz – 1000 MHz
- Typical output power : 160 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB > 80 W and H < -20 dBc from 30 MHz to 80 MHz
 - P1dB > 170 W and H < -20 dBc from 80 MHz to 500 MHz
 - P1dB > 100 W and H < -20 dBc from 500 MHz to 1000 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to LT 320 possible (7U)
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance:

- Amplifier designed for minimal maintenance
 - ⇒ Easy access to all parts
 - ⇒ Modular design
 - ⇒ Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications:

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions:

- **LT 160 S** : standard amplifier
- **LT 160 D** : LT 160 S with:
 - ⇒ Display
 - ⇒ Digital control
 - ⇒ IEEE 488 GPIB Communication
- **LT 160 SC** : LT 160 S with :
 - ⇒ Integrated bidirectional coupler
- **LT 160 DC** : LT 160 D with :
 - ⇒ Integrated bidirectional coupler
 - ⇒ display of instantaneous power

LT series:

- LT 90 => 90 W CW
- LT 320 => 320 W CW
- LT 600 => 600 W CW

Prana additional options:

- External coupler
- Supply and integration inside a cabinet
- RF Power cable
- Switching unit



Photo: LT 160 D

Specifications


Frequency bandwidth.....	20 MHz - 1000 MHz
Typical output power.....	160 W
Power at 3 dB compression.....	95 W min. up to 80 MHz / 200 W min. from 80 MHz to 500 MHz / 120 W min. from 500 MHz to 1000 MHz
Power at 1 dB compression.....	80 W min. up to 80 MHz / 170 W min. from 80 MHz to 500 MHz / 100 W min. from 500 MHz to 1000 MHz
Harmonics distortion.....	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type.....	Class A
Gain.....	51 dB
Linear power gain flatness.....	± 3 dB max
Mismatch tolerance.....	infinite without damage
Input impedance.....	50 ohms / VSWR: 2:1max
Output impedance.....	50 ohms / VSWR: 2:1max
Input power.....	+10 dBm max.
RF input connector.....	Type N fem. (front or rear panel) – other connector type on request
RF output connector.....	Type N fem. (front or rear panel) – other connector type on request
Ambient operating temperature.....	0 °C / + 35 °C
Room temperature storage.....	-20 °C / +70 °C
Cooling.....	Forced air: 60 l/sec max. (self contained fans)
Power voltage.....	90-250 VAC, 47-63 Hz, single phase
Rated current.....	10 A at 110 VAC / 4.8 A at 230 VAC
Dimensions.....	630 x 450 x 178 mm (4U) / 24.8 x 17.7 x 7 in (4U)
Weight.....	34 kg / 75 lb

LT 160 D version

Safety interlock.....	Connector type BNC
Digital control.....	Transistors, power supplies and internal temperature
Communication interface.....	IEEE 488
4 lines digital display.....	Status, faults, (direct and reverse instantaneous power for DC version)

LT 160 SC and LT 160 DC versions

Integrated bidirectional power coupler.....	Coupling factor 40 dB (SC version) / 49 dB (DC version) ± 0.4 dB
Power coupling connector.....	Type N fem. (front or rear panel)
Estimated output power losses due to the coupler.....	0.3 dB

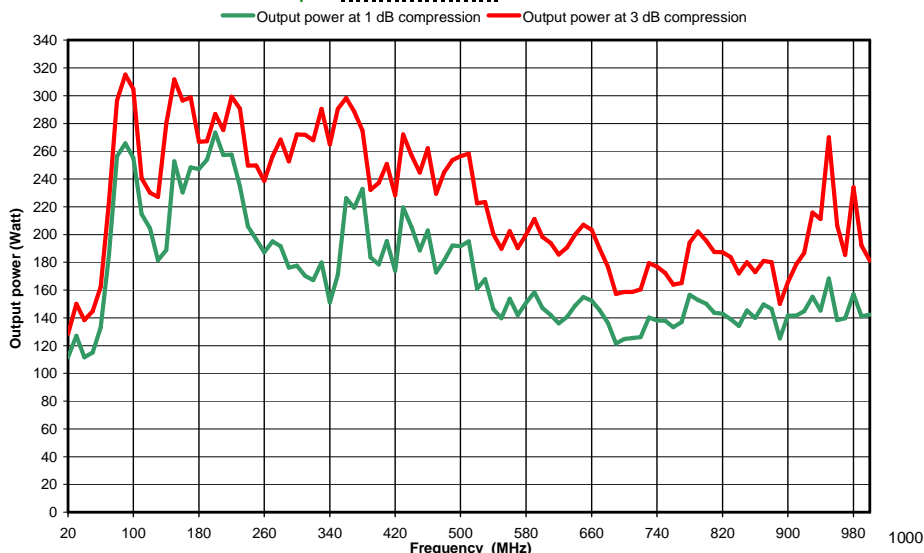

Electrical and Mechanical Specifications subject to change without notice.