

### Prana SW 100:

- Class A solid state
- Broadband (instantaneous single band): 0.8 GHz – 4 GHz
- Typical output power : 100 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
  - P1dB > 70 W and H < -20 dBc up to 3 GHz
  - P1dB > 60 W and H < -20 dBc from 3 GHz to 4 GHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to SW 200 possible
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

### Maintenance:

- Amplifier designed for minimal maintenance
  - ⇒ Easy access to all parts
  - ⇒ Modular design
  - ⇒ Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

### Applications:

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

### Versions:

- **SW 100 D** amplifier with:
  - ⇒ Display
  - ⇒ Digital control
  - ⇒ IEEE 488 GPIB Communication
- **SW 100 DC** : SW 100 D with :
  - ⇒ Integrated bidirectional coupler
  - ⇒ display of instantaneous power

### SW series:

- SW 18 => 18 W CW
- SW 35 => 35 W CW
- SW 65 => 65 W CW
- SW 200 => 200 W CW

### Prana additional options:

- External coupler
- Supply and integration inside a cabinet
- RF Power cable
- Switching unit




### Specifications

Frequency bandwidth	0.8 GHz – 4 GHz
Typical output power	100 W
Power at 3 dB compression	90 W min. up to 3 GHz / 70 W min. from 3 GHz to 4 GHz *
Power at 1 dB compression	70 W min. up to 3 GHz / 60 W min. from 3 GHz to 4 GHz *
Harmonics distortion	H2,H3 < -20 dBc for output power at 1 dB compression
Class type	Class A
Gain	56 dB
Linear power gain flatness	± 5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1max
Output impedance	50 ohms / VSWR: 2:1max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies and internal temperature
Communication interface	IEEE 488
4 lines digital display	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air: 120 l/sec max. (self contained fans)
Power voltage	200-250 VAC, 47-63 Hz, single phase
Rated current	4.8 A at 230 VAC
Dimensions	430 x 640 x 311 mm (7U) / 16.9 x 25.2 x 12.2 in (7U)
Weight	33 kg / 72.6 lb

### SW 100 DC versions

Integrated bidirectional power coupler	Coupling factor 49 dB (DC version) ± 0.4 dB
Power coupling connector	Type N fem. (front or rear panel)
Estimated output power losses due to the coupler	0.4 dB

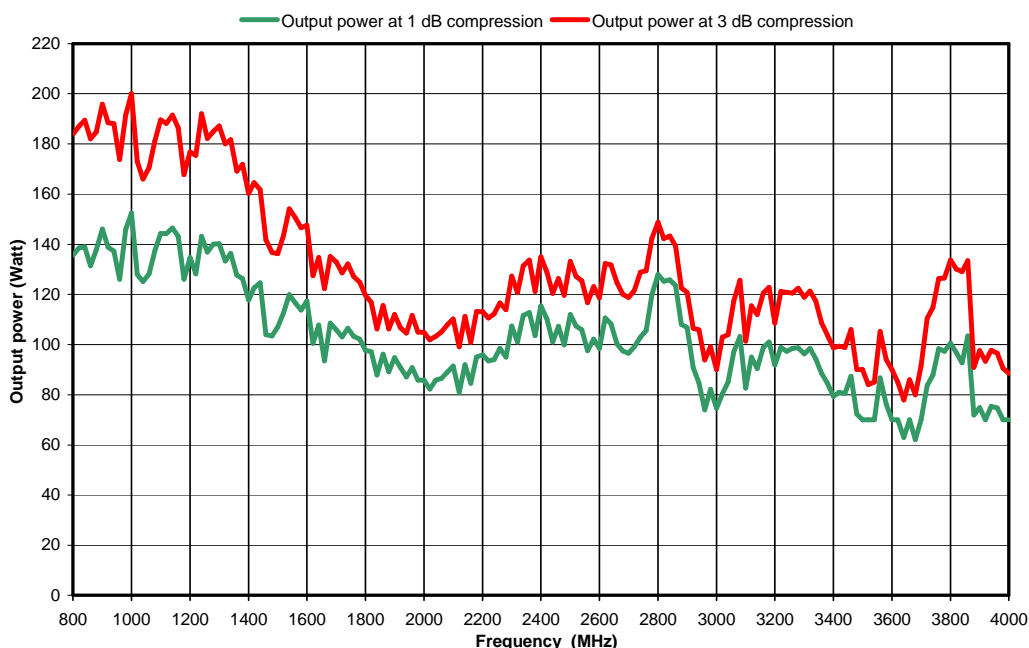

\* Except DC version

Electrical and Mechanical Specifications subject to change without notice.