

### Prana TU 60:

- Class A solid state
- Broadband (instantaneous single band): 0.8 GHz – 2 GHz
- Typical output power : 60 W CW  
Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
  - P1dB > 35 W and H < -20 dBc up to 1 GHz
  - P1dB > 40 W and H < -20 dBc from 1 GHz to 2 GHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to TU 100 possible
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

### Maintenance:

- Amplifier designed for minimal maintenance
  - ⇒ Easy access to all parts
  - ⇒ Modular design
  - ⇒ Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

### Applications:

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

### Versions:

- **TU 60 S** : standard amplifier
- **TU 60 D** : TU 60 S with:
  - ⇒ Display
  - ⇒ Digital control
  - ⇒ IEEE 488 GPIB Communication
- **TU 60 SC** : TU 60 S with :
  - ⇒ Integrated bidirectional coupler
- **TU 60 DC** : TU 60 D with :
  - ⇒ Integrated bidirectional coupler
  - ⇒ display of instantaneous power

### TU series:

- TU 16 => 16 W CW
- TU 30 => 30 W CW
- TU 100 => 100 W CW
- TU 200 => 200 W CW

### Prana additional options:

- External coupler
- Supply and integration inside a cabinet
- RF Power cable
- Switching unit



Photo: TU 60 D

### Specifications


Frequency bandwidth.....	0.8 GHz – 2 GHz
Typical output power.....	60 W
Power at 3 dB compression.....	40 W min. up to 1 GHz / 50 W min. from 1 GHz to 2 GHz *
Power at 1 dB compression.....	35 W min. up to 1 GHz / 40 W min. from 1 GHz to 2 GHz *
Harmonics distortion.....	H2,H3 < -20 dBc for output power at 1 dB compression
Class type.....	Class A
Gain.....	50 dB
Linear power gain flatness.....	± 3 dB max
Mismatch tolerance.....	infinite without damage
Input impedance.....	50 ohms / VSWR: 2:1max
Output impedance.....	50 ohms / VSWR: 2:1max
Input power.....	+10 dBm max.
RF input connector.....	Type N fem. (front or rear panel) – other connector type on request
RF output connector.....	Type N fem. (front or rear panel) – other connector type on request
Ambient operating temperature.....	0 °C / + 35 °C
Room temperature storage.....	-20 °C / +70 °C
Cooling.....	Forced air: 60 l/sec max. (self contained fans)
Power voltage.....	90-250 VAC, 47-63 Hz, single phase
Rated current.....	4.2 A at 110 VAC / 2 A at 230 VAC
Dimensions.....	630 x 450 x 178 mm (4U) / 24.8 x 17.7 x 7 in (4U)
Weight.....	35 kg / 77 lb

### TU 60 D version

Safety interlock.....	Connector type BNC
Digital control.....	Transistors, power supplies and internal temperature
Communication interface.....	IEEE 488
4 lines digital display.....	Status, faults, (direct and reverse instantaneous power for DC version)

### TU 60 SC and TU 60 DC versions

Integrated bidirectional power coupler.....	Coupling factor 40 dB (SC version) / 49 dB (DC version) ± 0.4 dB
Power coupling connector.....	Type N fem. (front or rear panel)
Estimated output power losses due to the coupler.....	0.3 dB

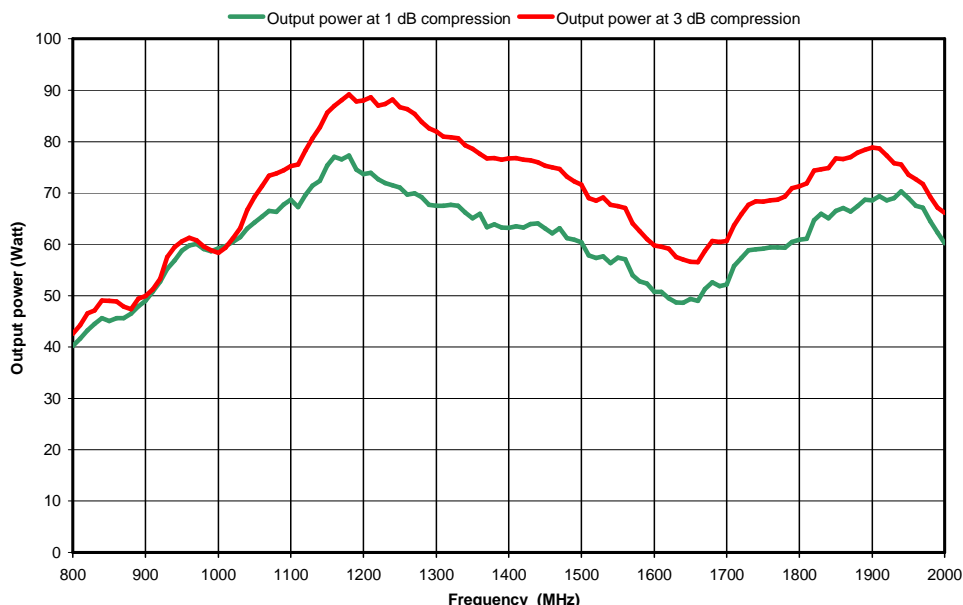

\* Except DC version

Electrical and Mechanical Specifications subject to change without notice.